
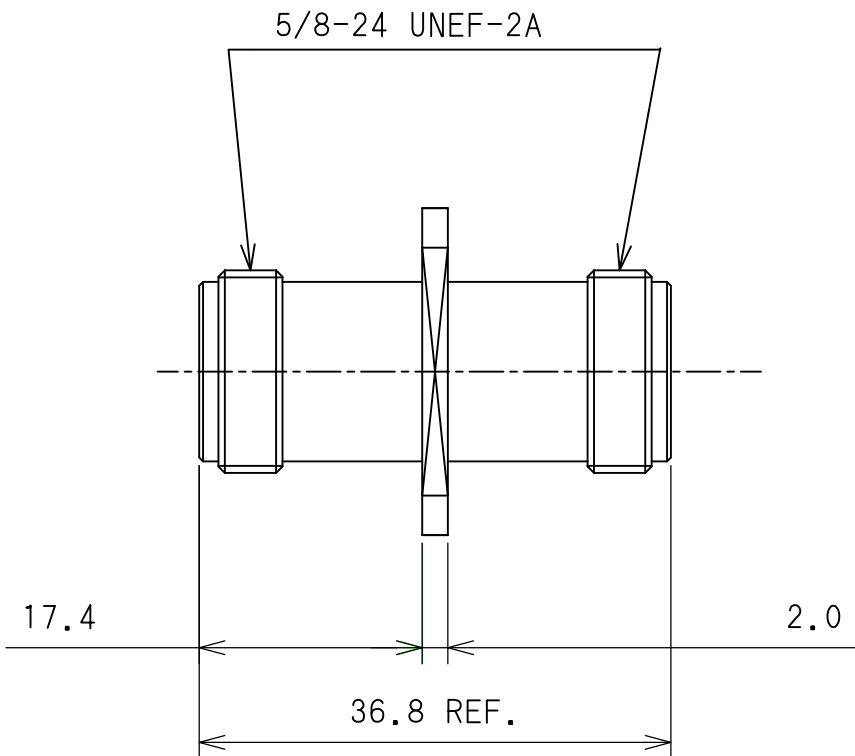


RoHS10 Support

REACH Support

CFSI Support

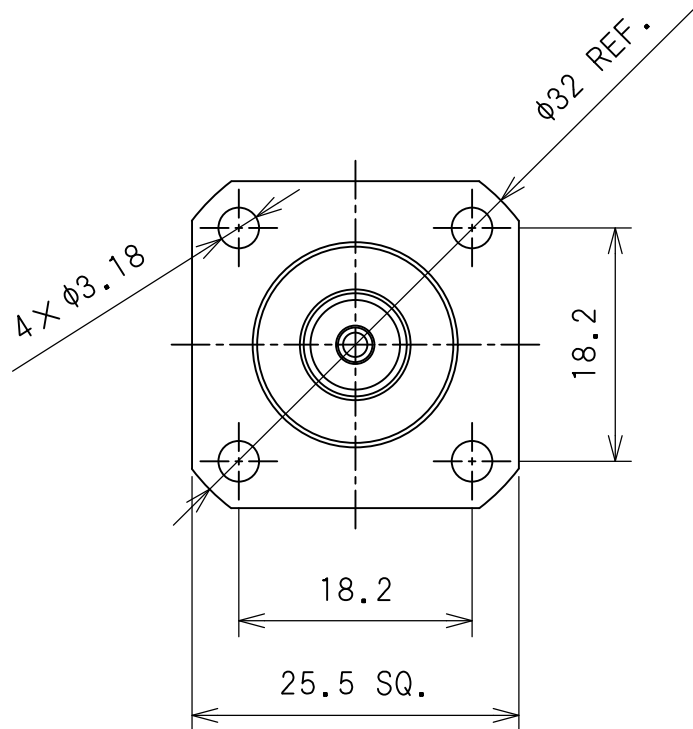

○規格 (Standard)
JIS-C-5411
MIL-C-39012

○仕様 (Specification)
特性インピーダンス (Impedance) : 50Ω
定格周波数 (Working Frequency Range) : DC~11GHz
電圧定在波比 (VSWR) : ≤1.25max
挿入損失 (Insertion Loss) : 0.05dB max × √f GHz (f:Frequency)
定格電圧 (Voltage Rating) : 500V rms
耐電圧 (Proof Voltage) : 1000V rms
接触抵抗 (Contact Resistance) : 1mΩ max
絶縁抵抗 (Insulation Resistance) : ≥5000MΩ
勘合保証回数 (Connector Life) : 500 times min



3	Contact	P.BRONZE	SILVER
2	Dielectric	PTFE	NONE
1	Body	BRASS	SILVER
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE DECIMALS .XX ±0.10 .X ±0.15 DIAMETER .X ±0.10				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD		
Approved	Checked	Drawn				
			Unit mm	N A M E	N-RSS-254-Hi	REV
			A4			2