


RoHS10 Support

REACH Support

CFSI Support

○規格 (Standard)
MIL-C-39012

○仕様 (Specification)
特性インピーダンス (Impedance) : 50 Ω
定格周波数 (Working Frequency Range) : DC~6.0GHz
電圧定在波比 (VSWR) : ≤1.30
定格電圧 (Voltage Rating) : 300V rms
耐電圧 (Proof Voltage) : 1000V rms
接触抵抗 (Contact Resistance) : 8m Ω max
絶縁抵抗 (Insulation Resistance) : ≥5000M Ω
勘合保証回数 (Connector Life) : 500 times min
使用温度範囲 (Temperature range) : -50℃~155℃
推奨締め付けトルク (Recommended Torque) 0.7~1.1 Nm

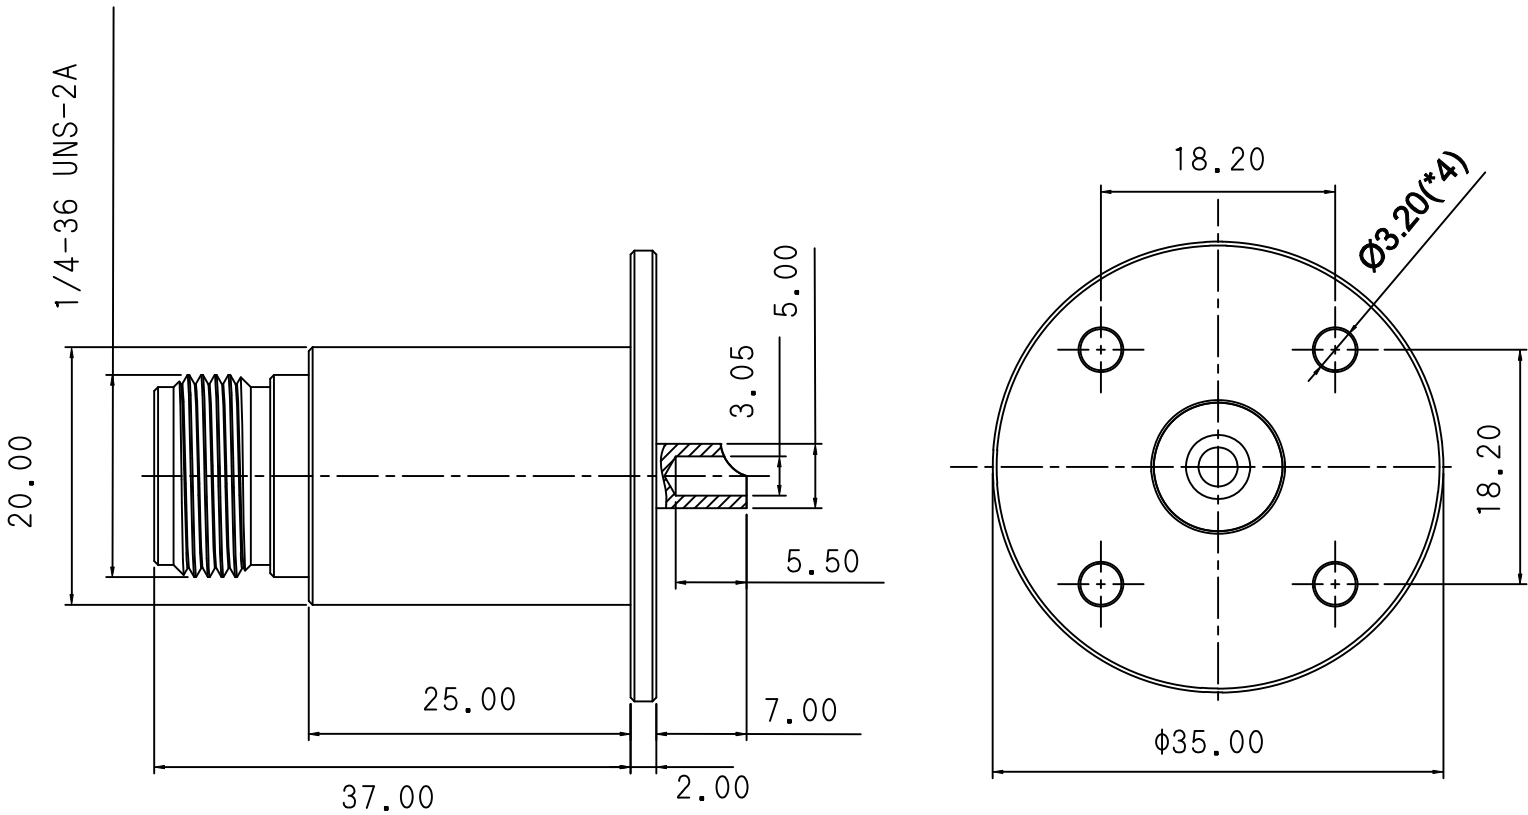

3	Contact	P.Bronze	GOLD
2	Dielectric	PTFE	NONE
1	Body	BRASS	NICKEL
No	DESCRIPTION	MATERIAL	FINISH

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD		
DECIMALS	.XX ±0.10	.X ±0.15				
DIAMETER	.X ±0.10		Unit	N A M E	N-PR-35	REV
Approved	Checked	Drawn	mm			
			A4			2
エレパーツ '25.09.15 大江	エレパーツ '25.09.15 森井	エレパーツ '25.09.15 大江				