

1

2

3

4

5

6


7

8

DIMENSIONS IN (mm)

50K

	NOMINAL SIZE		d	L	H	H1	h1	h2	m1	m2	VALVE ORIFICE	PANEL	
	inch	mm										HOLE DIAMETER	MAX THICKNESS
☐ →	1/4	6.35	6.53	64	38	28	14	19	45.5	30	5	14.7	6
☐ →	3/8	9.52	9.7	72	44	31.5	17	22	60	38	7	16.2	7.5
☐ →	1/2	12.7	12.88	82	48	34	22	22	60	38	9.2	19.4	9.8
☐ →	3/4	19.05	19.23	89	50.5	33	28.5	24	67	43	12.5	19.4	9

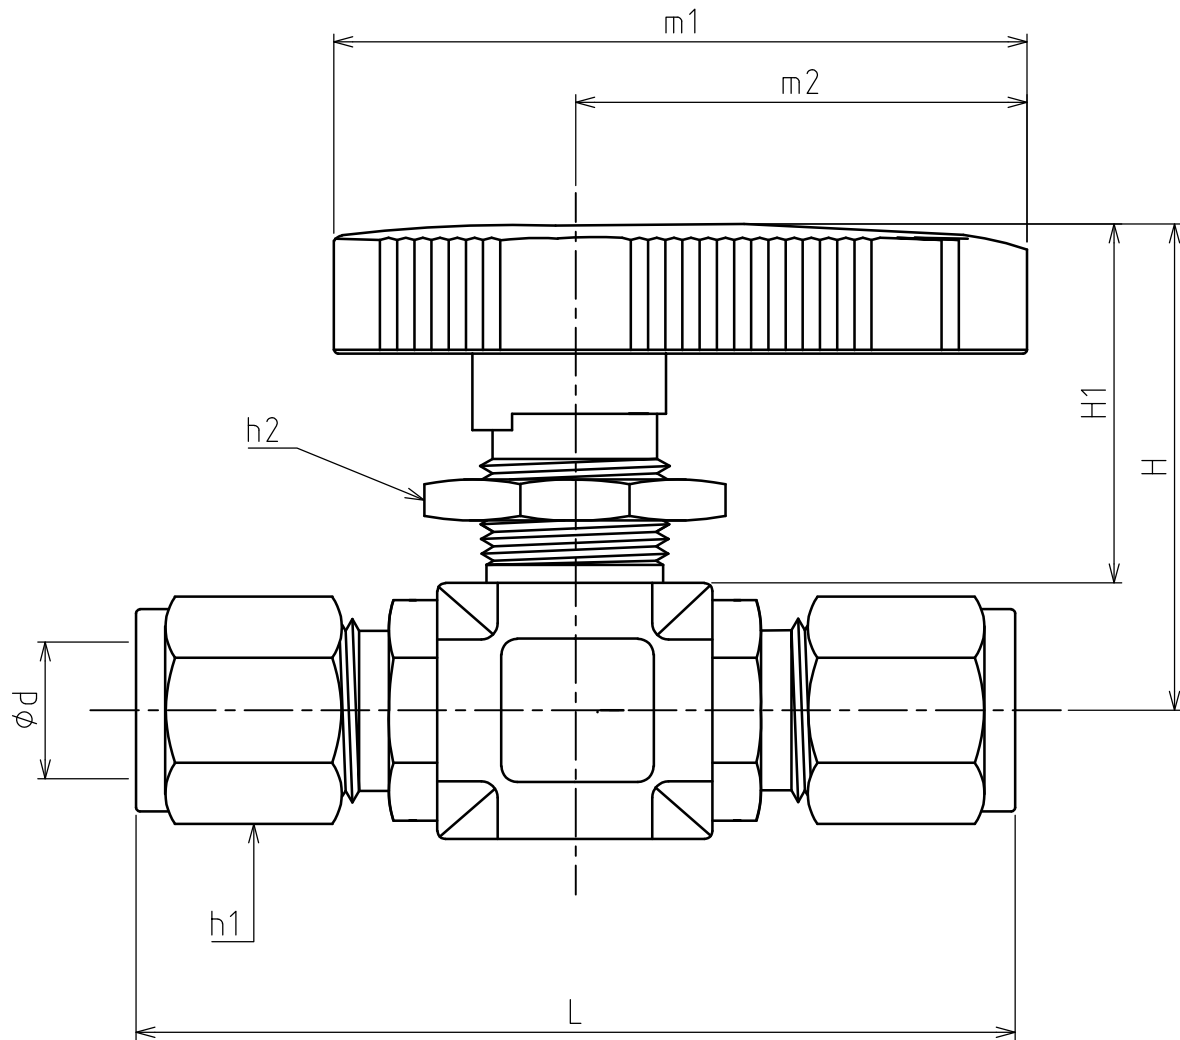

O-RING	☐ →	Viton
	☐ →	EPDM
PANEL NUT	☐ →	SUS304
	☐ →	SUS316
PACKING		PTFE
HANDLE LOCK		SUS304
HANDLE		RESIN+METAL
STEM		SUS316
BALL		SUS316
BODY		SCS14
NAME		MATERIAL
名 称		材 質

Body Marking
REAR FRONT
Class Material



REV	DATE	DESCRIPTION	DESIGNED	CHECKED
◇ ×				
◇				
◇				
◇				

DESIGN PRESS 設計圧力	DESIGN TEMP 設計温度	TOTAL WEIGHT 総質量	FINISHING 仕上
MPa	℃	Kg	
UNLESS OTHERWISE SPECIFIED COMMERCIAL TOLERANCES TO BE APPLIED 特記ナキ寸法公差ハJ I S普通寸法差（中級）ニヨルコト			
承 認	APPROVED	照 査	CHECKED DESIGNED

図面名称	TITLE OUTLINE DRAWING IBV SERIES LOK TYPE BALL VALVE		
	DWG NO. E-BA2304-0	SCALE N.T.S	PROJECTION 3RD ANGLE
図番	ORIGINAL DWG	SECTIONAL DWG	
Inter-Valve Technology			