







SN25





SN32





SN40





SN50



SN65

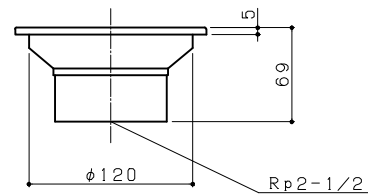

SN80

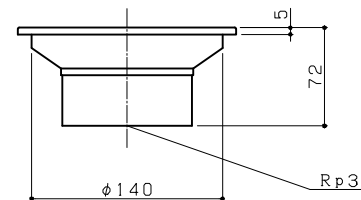

型式別開口率表

型式	配管断面積	目皿開口面積	開口率
SN25	0.0005	0.00096	192%
SN32	0.0008	0.00096	120%
SN40	0.0013	0.00164	126%
SN50	0.002	0.00164	82%
SN65	0.0033	0.00323	98%
SN80	0.0044	0.0048	109%

単位：m²

品名	運 SNシリーズ				
記事	ステンレス製吐出口				
設計	検 査	承 認	尺 度	数 量	材 質
Y. H	S. M	K. M	FREE		SUS304
2022.08.05	2022.08.05	2022.08.05			

SHOEI 株式会社 ショウエイ
TEL (044) 589-1601

団
番

X1060911-E