
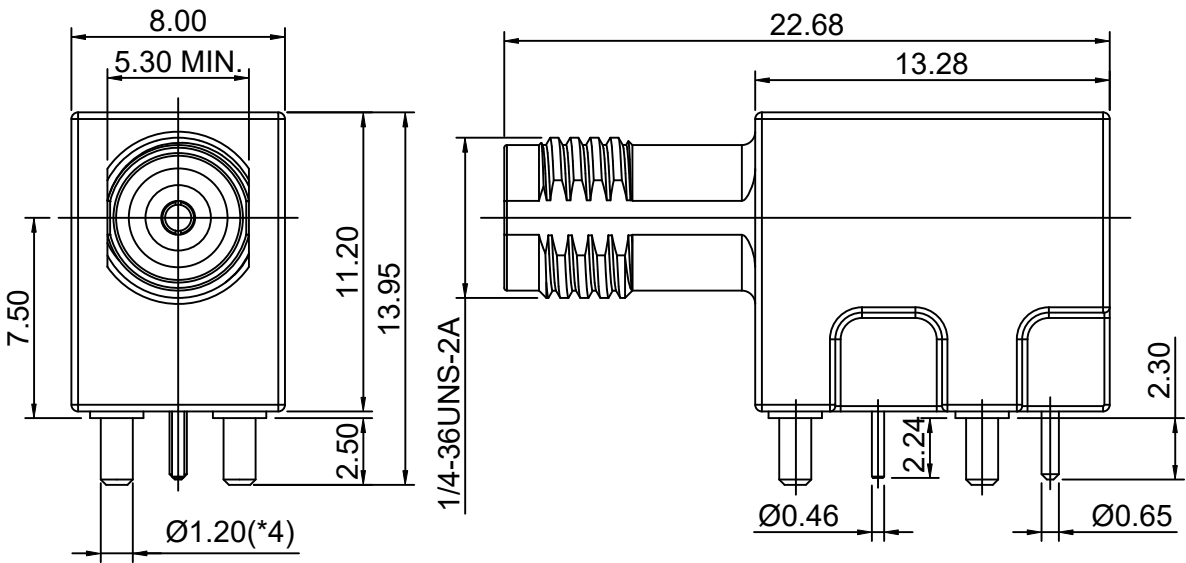
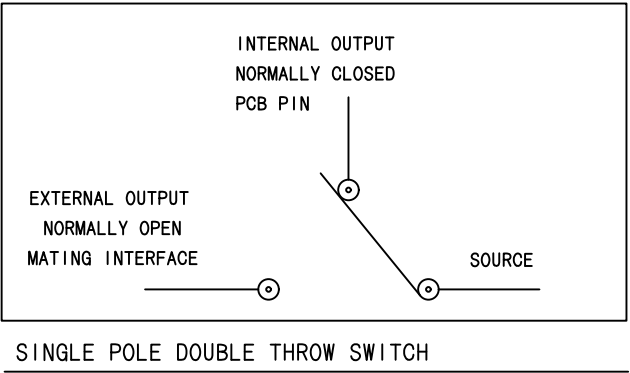


RoHS10 Support

REACH Support


CFSI Support

○形状 (SHAPE)

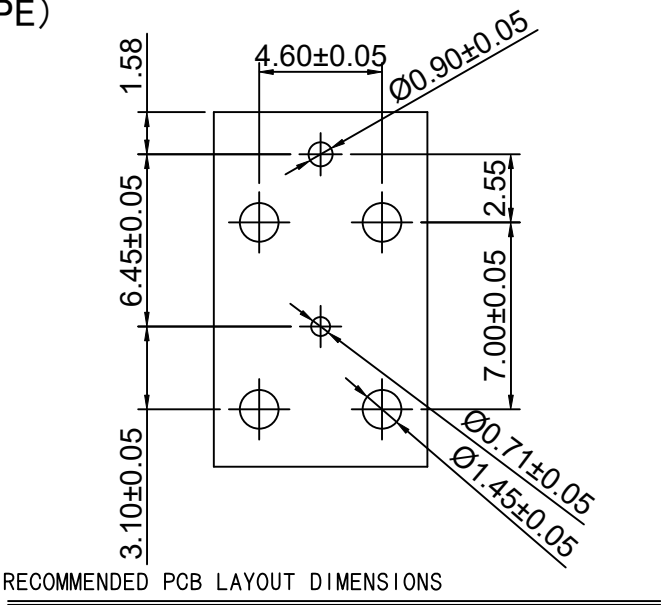


○仕様 (Specification)

特性インピーダンス (Impedance) : 50 Ω
周波数範囲 (Working Frequency Range) : DC~2.1GHz
電圧定在波比 (VSWR) : 1.4以下 (2.1GHz)
挿入損失 (Insertion Loss) : 0.25dB以下 (2.1GHz)
アイソレーション (Isolation) : 30dB以上
耐電圧 (Proof Voltage) : 500V RMS
使用温度範囲 (Operating Temperature Range) : -65°C~+165°C
勘合耐久回数 (Connector Life) : 500回以上
勘合規格 (Interface Standard) : 1/4-36UNS-2A (SMA標準)

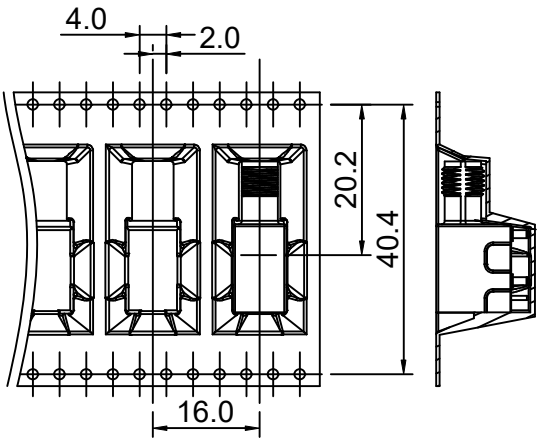

PACKAGE INSTRUCTION
(250 PCS PER REEL 13'')

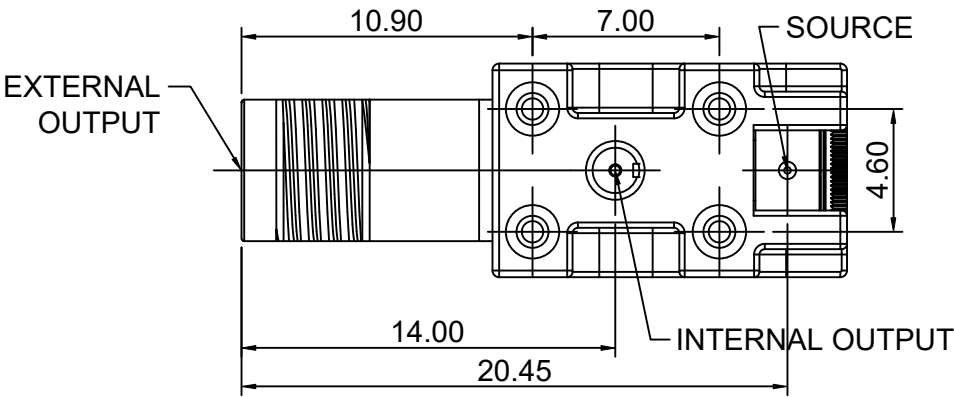

11	PROTECT CAP	BRASS	TIN
10	SPRING	STAINLESS STEEL	NATURE
9	DIELECTRIC TUBE	TEFLON	NATURE
8	CONTACT TUBE	BRASS	GOLD
7	INSULATOR-SOU	LCP	NATURE
6	INSULATOR-INT	LCP	NATURE
5	INSULATOR-EXT	PA6T	NATURE
4	CONTACT-SOU	BRASS	GOLD
3	CONTACT-INT	BRASS	GOLD
2	CONTACT-EXT	BE COPPER	GOLD
1	BODY	ZINC ALLOY	TIN
ITEM	DESCRIPTION	MATERIAL	FINISH

TOLERANCE				日本エレパーツ株式会社 NIHON ELEPARTS Co.,LTD		
DECIMALS	.XX ±0.10	.X ±0.15				
DIAMETER	.X ±0.10					
Approved	Checked	Drawn	Unit	NAME	SMA-LR-SWITCH	REV
			mm			1
			A4			