


SOP形

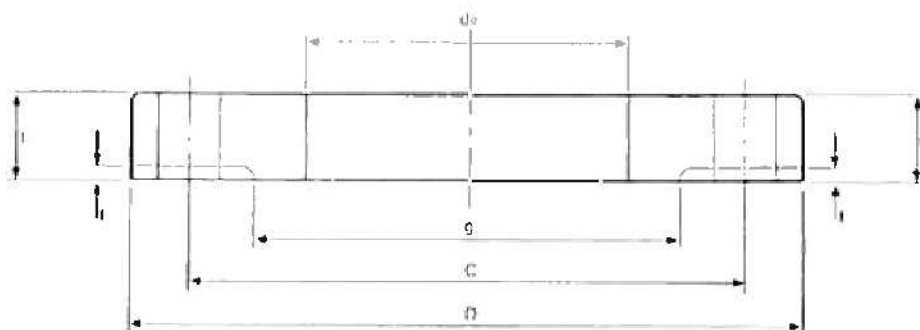

規格	寸法	適用管の 外 径	D	C	f	g	do	t	ボルト穴数	φ
15A	21.7	95	70	1	51	22.2	12	4	15	
20A	27.2	100	75	1	56	27.7	14	4	15	
25A	34.0	125	90	1	67	34.5	14	4	19	
32A	42.7	135	100	2	76	43.2	16	4	19	
40A	48.6	140	105	2	81	49.1	16	4	19	
50A	60.5	155	120	2	96	61.1	16	4	19	
65A	76.3	175	140	2	116	77.1	18	4	19	
80A	89.1	185	150	2	126	90.0	18	8	19	
90A	101.6	195	160	2	136	102.6	18	8	19	
100A	114.3	210	175	2	151	115.4	18	8	19	
125A	139.8	250	210	2	182	141.2	20	8	23	
150A	165.2	280	240	2	212	166.6	22	8	23	
200A	216.3	330	290	2	262	218.0	22	12	23	
250A	267.4	400	355	2	324	269.5	24	12	25	
300A	318.5	445	400	3	368	321.0	24	16	25	
350A	355.6	490	445	3	413	358.1	26	16	25	
400A	406.4	560	510	3	475	409.0	28	16	27	
450A	457.2	620	565	3	530	460.0	30	20	27	
500A	508.0	675	620	3	585	511.0	30	20	27	
550A	558.8	745	680	3	640	562.0	32	20	33	
600A	609.6	795	730	3	690	613.0	32	24	33	

名 称

10K SOP形フランジ


A.M.株式会社

〒501-0413 岐阜県本巣市晃延1430-8
TEL: 058-323-1545 FAX: 058-323-0466

図面番号

SOP-10-A-1

SOP形

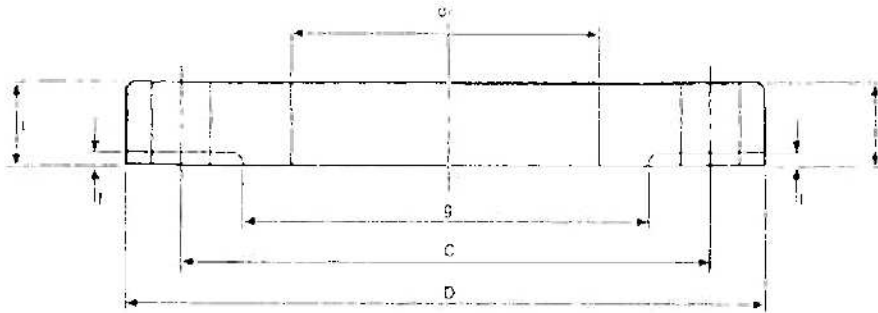[illegible]