
図面/規格 【JIS穴付同心止め輪(穴用・平和】

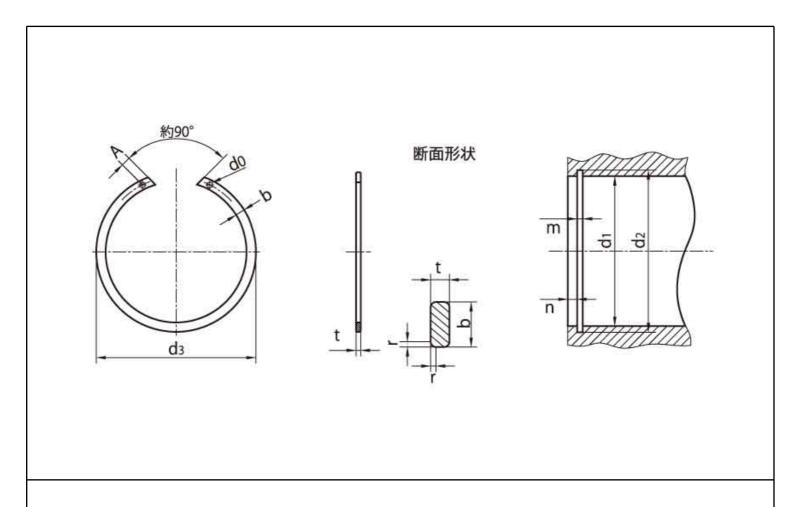

呼び	止め輪							適用する穴(参考)						ペンチ穴	
	外径 d3		厚さ t		板幅 b		面取り r	穴径 d1	溝底径 d2		溝幅 m		n	d0	A
	52	55.8	+2.5	2.00		4.0	±0.12	0.7	52	55.0	+0.25	2.20	+0.14	2.0	2.0
55	58.8	2.00			4.0	0.7		55	58.0	2.20		2.0		2.0	4.0
56	59.8	2.00			4.0	0.7		56	59.0	2.20		2.0		2.0	4.0
62	65.8	2.00		±0.08	4.0	0.7		62	65.0	2.20		2.0		2.0	4.0
68	72.1	2.50			5.0	0.7		68	71.0	2.70		2.5		2.5	5.0
72	76.1	2.50			5.0	0.7		72	75.0	2.70		2.5		2.5	5.0
75	79.1	2.50			5.0	0.7		75	78.0	2.70		2.5		2.5	5.0
80	85.0	2.50			5.0	0.7		80	83.5	2.70		2.5		2.5	5.0
85	90.0	3.00			6.0	±0.15	0.7	85	88.5	+0.35 0 +0.54	3.20	+0.18	3.0	3.0	6.0
90	95.0	3.00			6.0		0.7	90	93.5		3.20		3.0	3.0	6.0
95	100.0	3.00		±0.09	6.0		0.7	95	98.5		3.20		3.0	3.0	6.0
100	105.0	3.00			6.0		0.7	100	103.5		3.20		3.0	3.0	6.0
115	121.2	4.00			8.0		1.2	115	119.0		4.20		4.0	4.0	8.0