




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-508E7.5-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

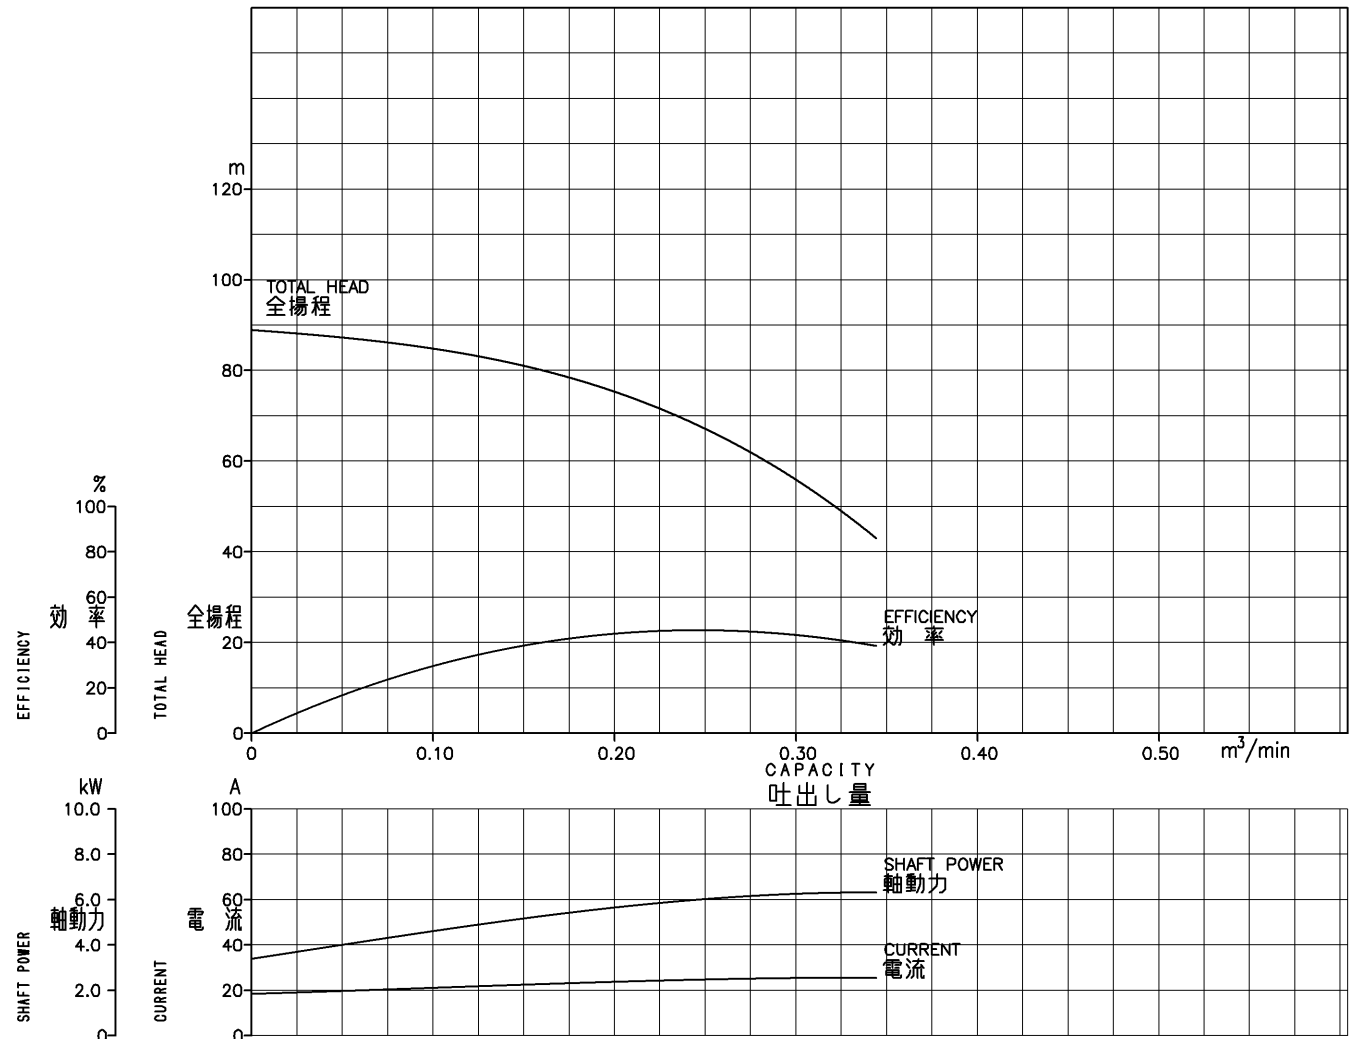

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m³/min	0	0.10	0.14	0.225	0.28	0.34	—	—	—
PUMP	全揚程	TOTAL HEAD	m	88.9	84.8	81.9	71.6	60.8	44.4	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	1.38	1.87	2.63	2.77	2.46	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	30.0	36.9	44.9	44.9	39.0	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	18.4	21.1	22.2	24.3	25.2	25.6	—	—	—
MOTOR	入力	INPUT	kW	3.73	5.03	5.52	6.38	6.74	6.89	—	—	—
MOTOR	出力	OUTPUT	kW	3.39	4.61	5.06	5.85	6.18	6.31	—	—	—
PUMP	仕様	吐出量CAPACITY	m³/min				性能	吐出量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	50mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500min⁻¹	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	7.5kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1460min⁻¹		電流	CURRENT	29.6A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		