




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-65HE2.2-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

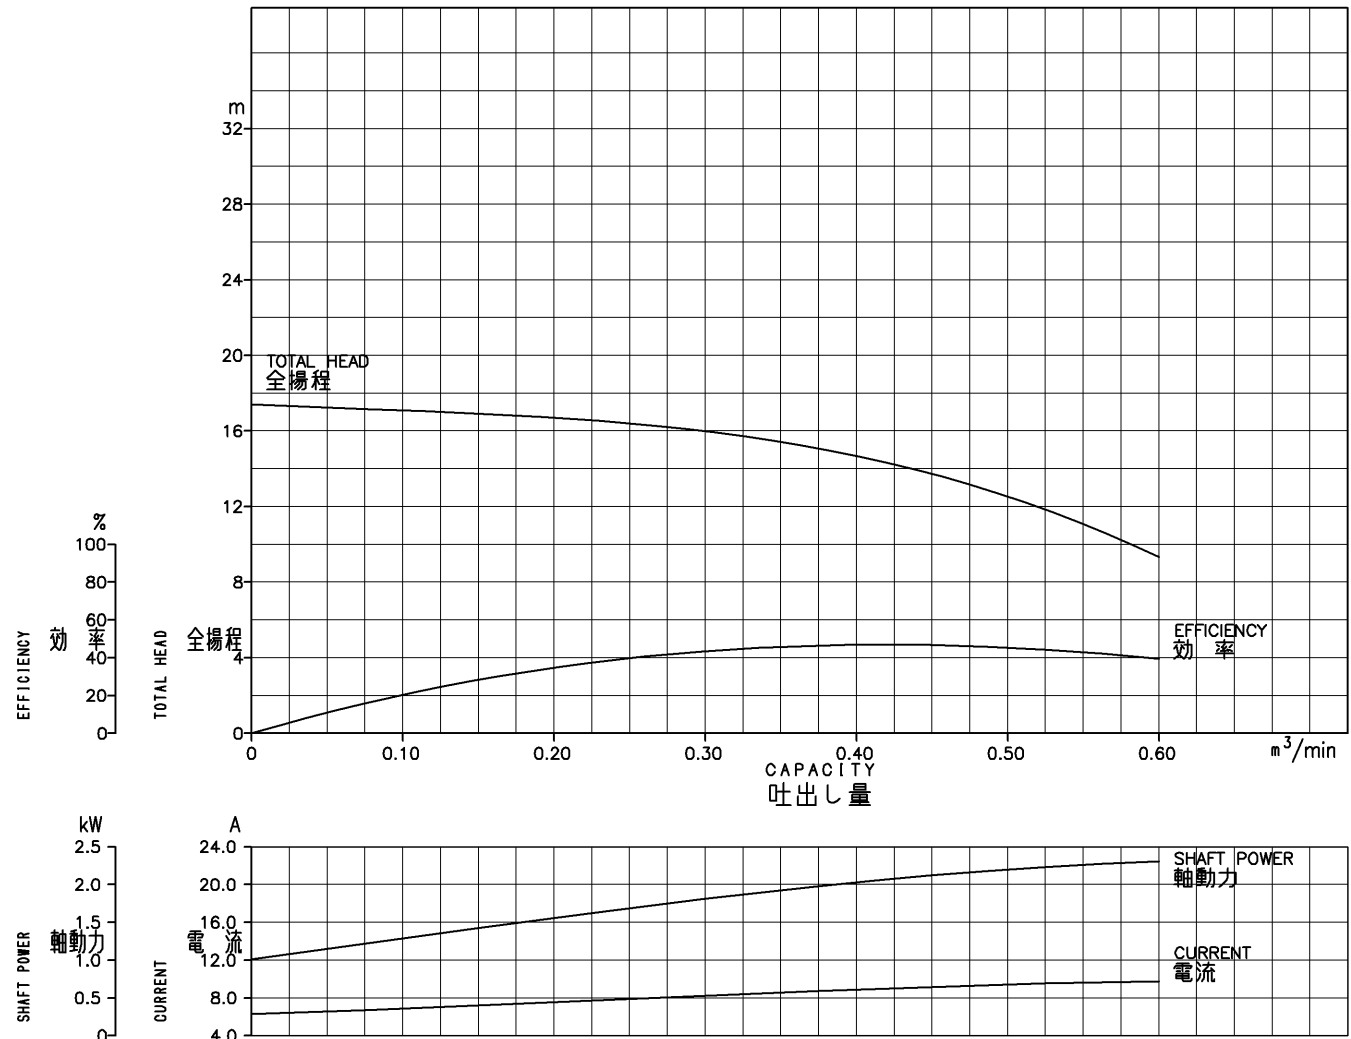

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.10	0.25	0.37	0.50	0.60	—	—	—
PUMP	全揚程	TOTAL HEAD	m	17.4	17.1	16.4	15.1	12.5	9.3	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.28	0.67	0.91	1.02	0.91	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	21.6	39.6	46.4	46.5	39.5	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	6.29	6.88	7.89	8.70	9.42	9.77	—	—	—
MOTOR	入力	INPUT	kW	1.17	1.47	1.91	2.23	2.49	2.62	—	—	—
MOTOR	出力	OUTPUT	kW	1.01	1.29	1.69	1.97	2.20	2.31	—	—	—
PUMP	仕様	吐出し量CAPACITY	m³/min				性能	吐出し量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	65 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min⁻¹	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	2.2 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1450 min⁻¹		電流	CURRENT	9.6 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		