




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-150LE5.5-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

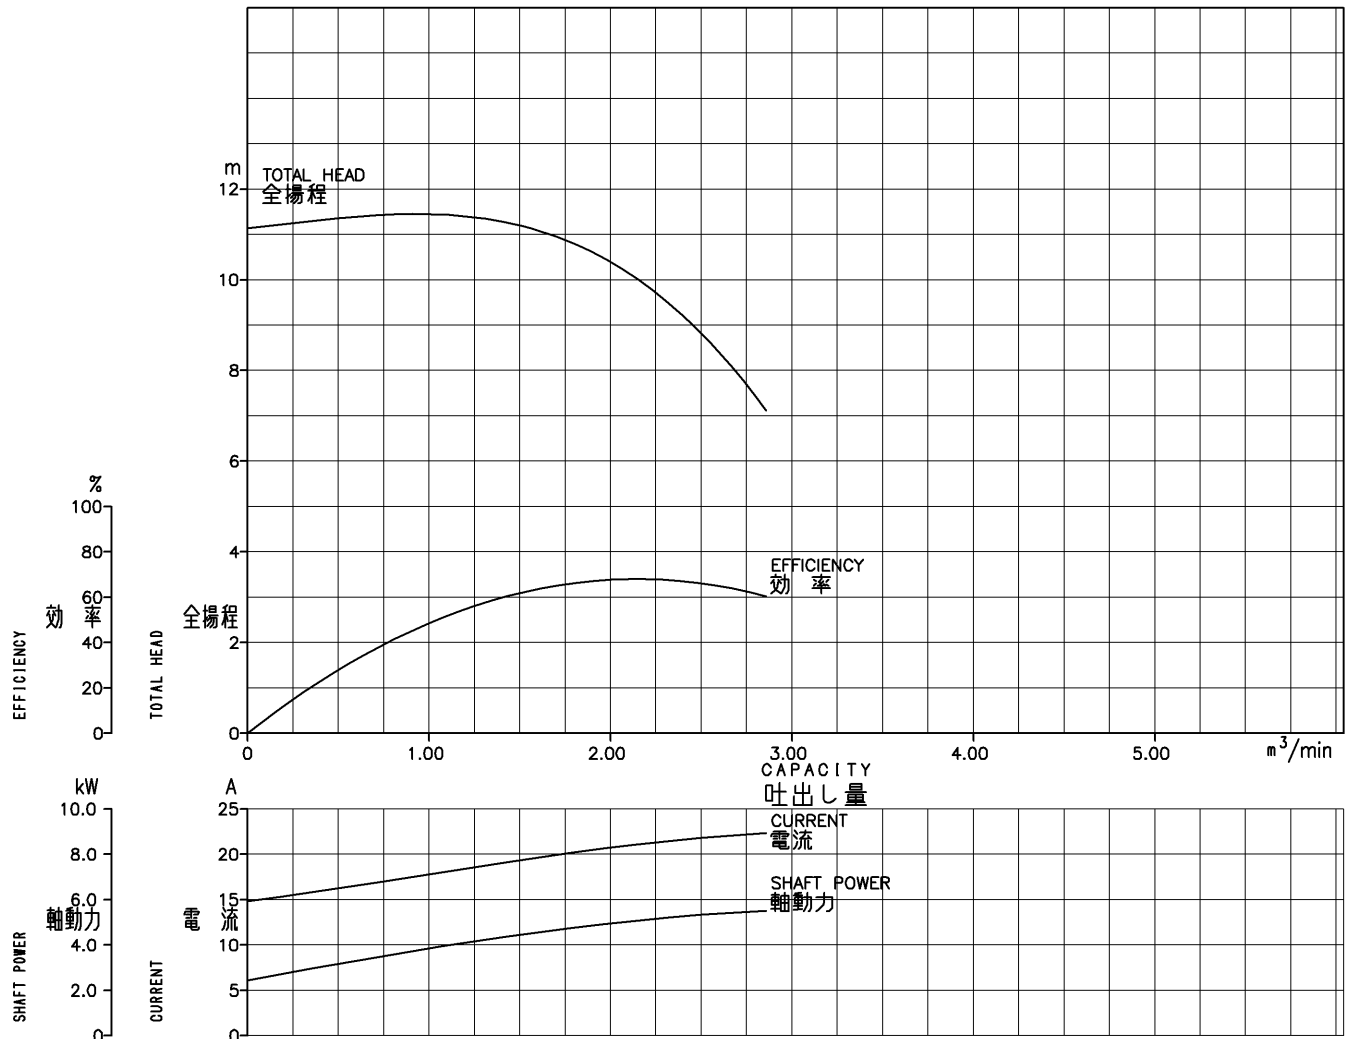

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.50	1.00	1.60	2.20	2.80	—	—	—
	全揚程	TOTAL HEAD	m	11.1	11.4	11.4	11.1	9.9	7.4	—	—	—
	理論動力	WATER POWER	kW	0.00	0.93	1.87	2.89	3.54	3.39	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	29.2	48.5	63.4	69.1	61.7	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	14.8	16.3	17.8	19.6	21.2	22.3	—	—	—
	入力	INPUT	kW	2.72	3.49	4.22	4.99	5.61	6.02	—	—	—
	出力	OUTPUT	kW	2.45	3.17	3.85	4.56	5.12	5.49	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	150mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	5.5kW		相・電圧	PHASE-VOLT.	3 ϕ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1465 min^{-1}		電流	CURRENT	22.6A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		