




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-150ME11-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

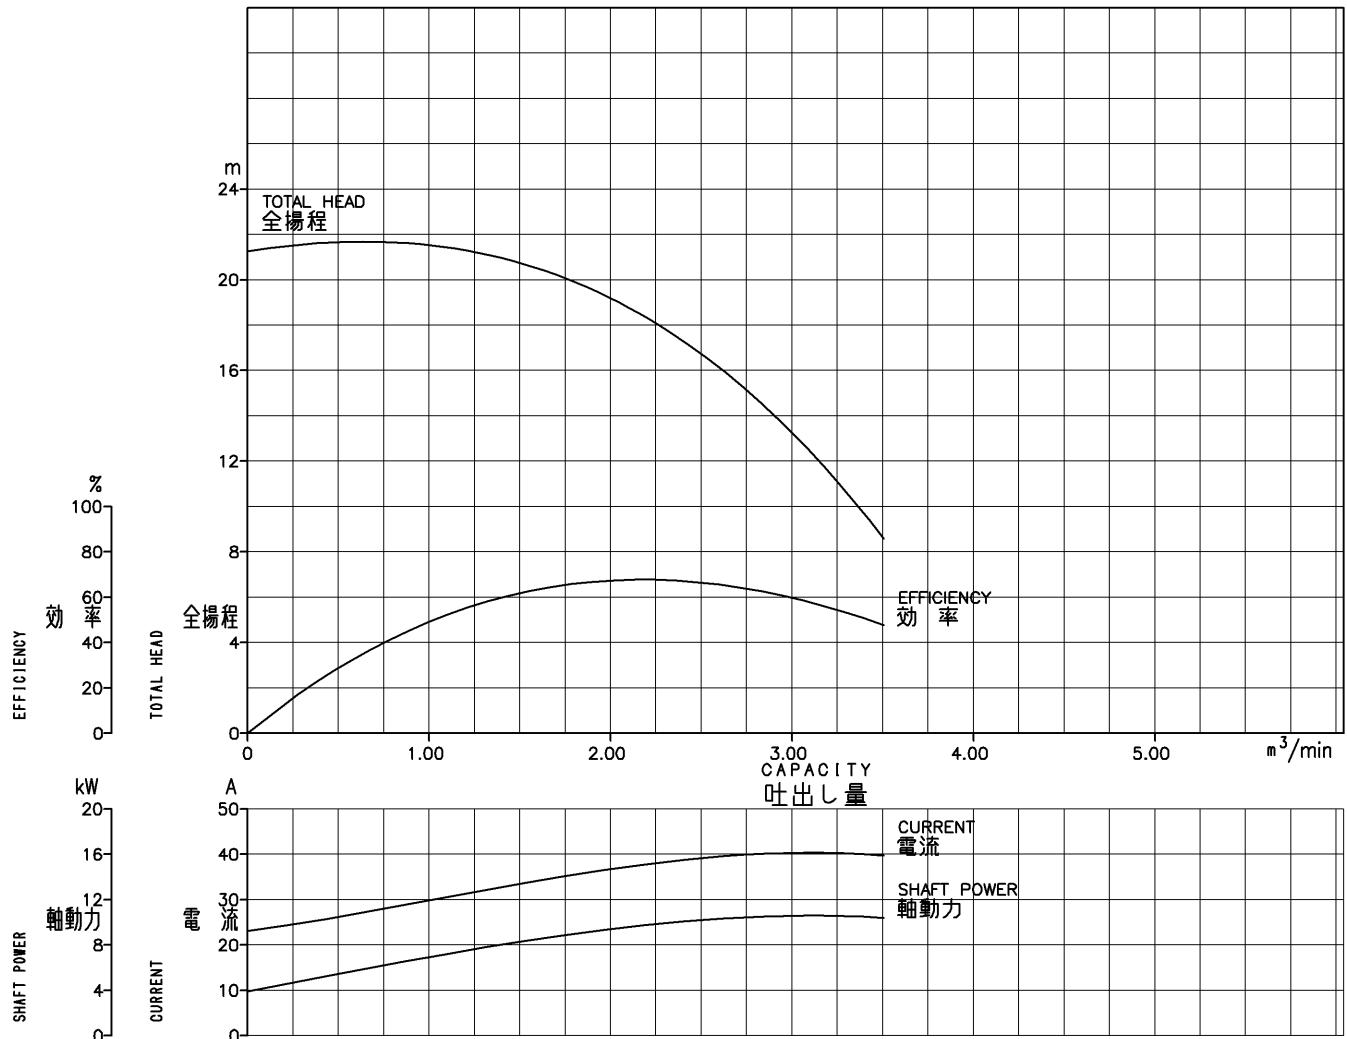

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	1.00	1.60	2.40	3.15	3.50	—	—	—
	全揚程	TOTAL HEAD	m	21.3	21.5	20.5	17.3	12.0	8.6	—	—	—
	理論動力	WATER POWER	kW	0.0	3.5	5.3	6.8	6.2	4.9	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	50.6	62.6	67.1	58.2	47.4	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	23.1	29.8	34.2	38.8	40.3	39.8	—	—	—
	入力	INPUT	kW	4.3	7.5	9.2	10.9	11.4	11.2	—	—	—
	出力	OUTPUT	kW	3.9	6.9	8.5	10.1	10.6	10.4	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	150 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	11 kW		相・電圧	PHASE-VOLT.	3 ϕ 200 V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50 Hz		回転速度	SPEED OF ROTATION	1465 min^{-1}		電流	CURRENT	42 A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		