




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-150KW45-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

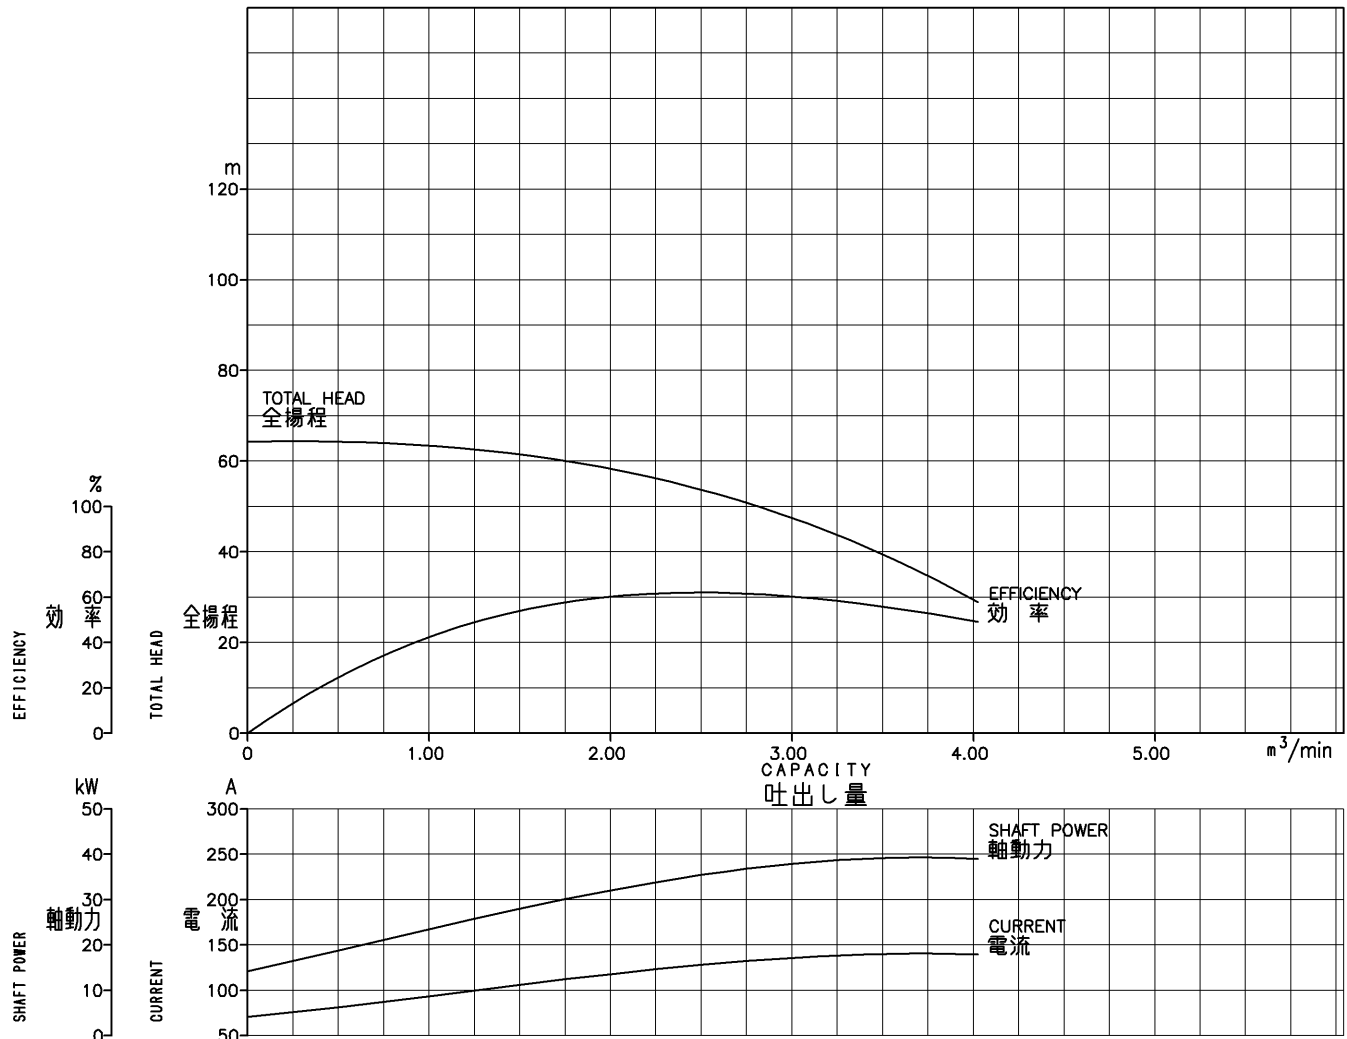

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	1.00	1.80	2.70	3.55	4.00	—	—	—
	全揚程	TOTAL HEAD	m	64.3	63.5	59.8	51.4	38.6	29.5	—	—	—
	理論動力	WATER POWER	kW	0.0	10.3	17.5	22.6	22.3	19.2	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	44.0	57.5	61.9	56.9	49.2	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	71	94	113	132	140	140	—	—	—
	入力	INPUT	kW	15.3	24.9	32.1	38.4	41.3	41.1	—	—	—
	出力	OUTPUT	kW	14.2	23.5	30.5	36.6	39.2	39.1	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	150 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	45 kW		相・電圧	PHASE-VOLT.	3φ 200 V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60 Hz		回転速度	SPEED OF ROTATION	1780 min^{-1}		電流	CURRENT	162 A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		