




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-50LW0.75-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

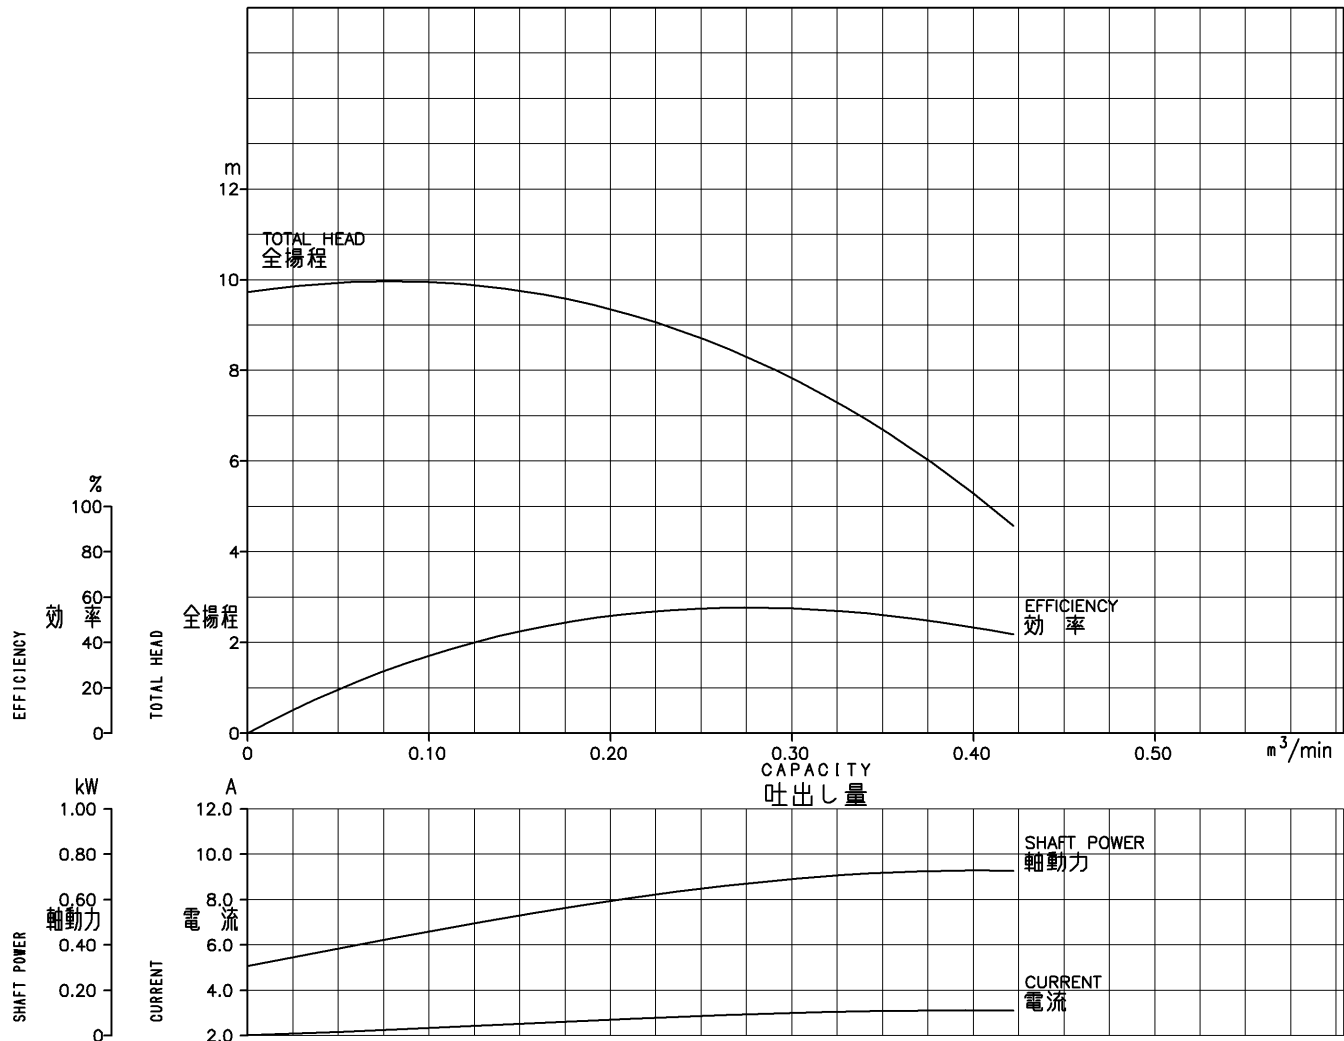

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m³/min	0	0.10	0.18	0.27	0.36	0.42	—	—	—
PUMP	全揚程	TOTAL HEAD	m	9.73	9.95	9.54	8.39	6.43	4.65	—	—	—
PUMP	理論動力	WATER POWER	kW	0.000	0.162	0.28	0.369	0.378	0.318	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	35.2	49.1	55.3	52.3	43.8	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	2.02	2.35	2.64	2.93	3.10	3.12	—	—	—
MOTOR	入力	INPUT	kW	0.362	0.53	0.656	0.771	0.837	0.844	—	—	—
MOTOR	出力	OUTPUT	kW	0.308	0.46	0.57	0.667	0.722	0.727	—	—	—
PUMP	仕様	吐出量CAPACITY	m³/min				性能	吐出量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	50mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800min⁻¹	
MOTOR	型式	MODEL	SF-PRO		出力	OUTPUT	0.75kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1710min⁻¹		電流	CURRENT	3.3A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		