




TYPE 名称	清水用渦巻ポンプ	MODEL 型式	TON2-65HW3.7-P	FUREQUENCY 周波数	60 Hz
------------	----------	-------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

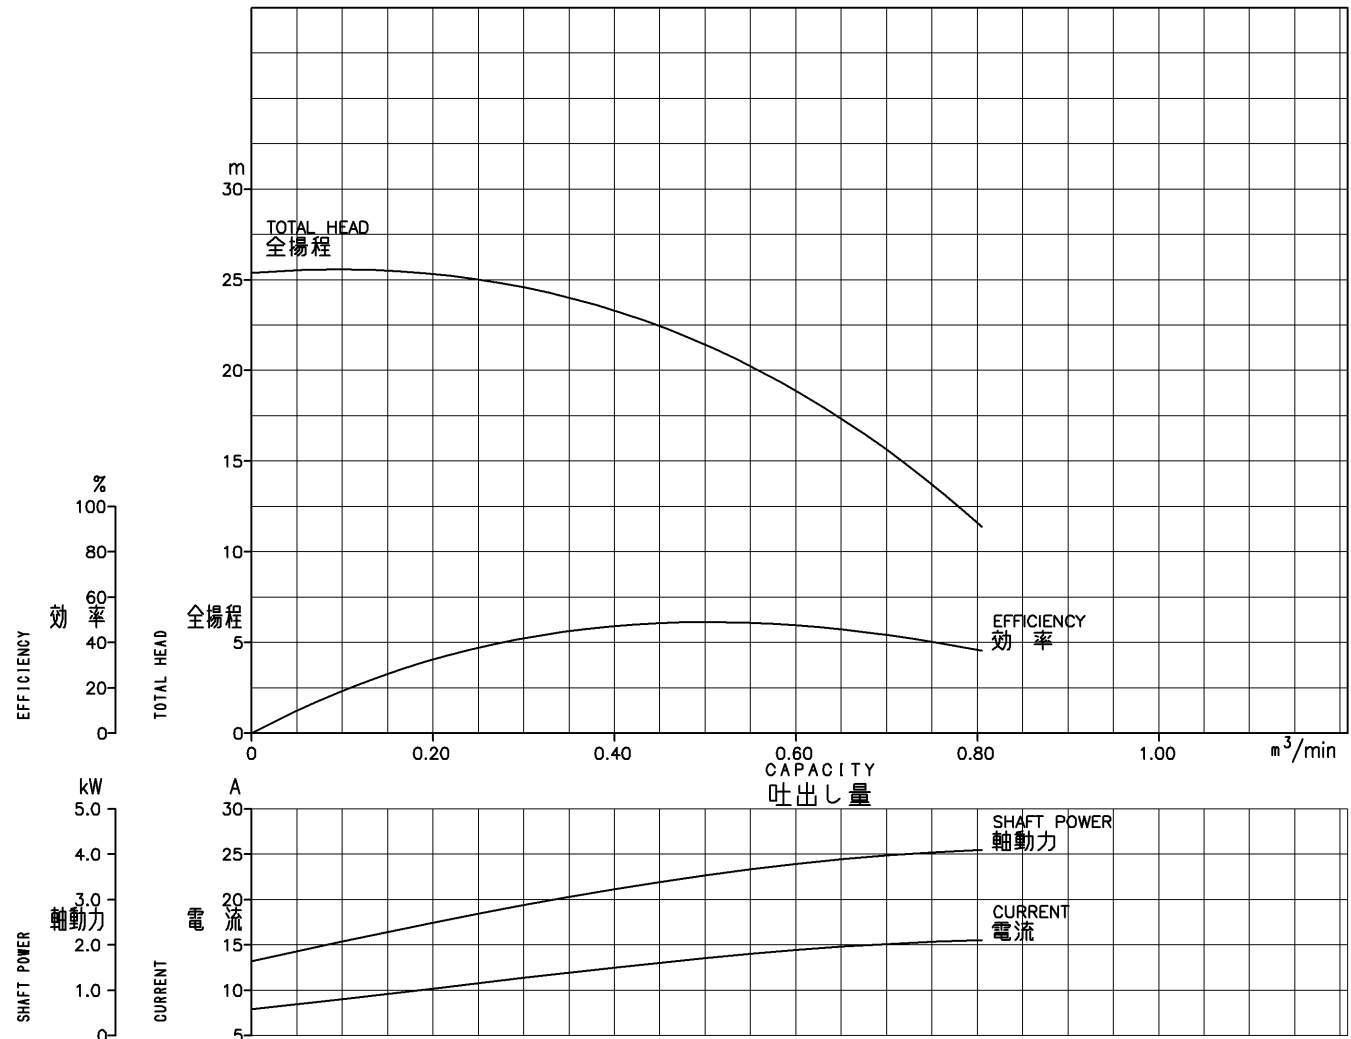

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.15	0.28	0.42	0.56	0.80	—	—	—
PUMP	全揚程	TOTAL HEAD	m	25.4	25.5	24.8	23.0	20.0	11.6	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.62	1.13	1.57	1.82	1.51	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	27.2	40.2	47.7	49.4	37.0	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	7.9	9.6	11.2	12.8	14.1	15.5	—	—	—
MOTOR	入力	INPUT	kW	1.81	2.52	3.09	3.65	4.12	4.59	—	—	—
MOTOR	出力	OUTPUT	kW	1.64	2.29	2.81	3.30	3.70	4.09	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	65 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min^{-1}	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	3.7 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1745 min^{-1}		電流	CURRENT	14.4 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		