




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-80LW2.2-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

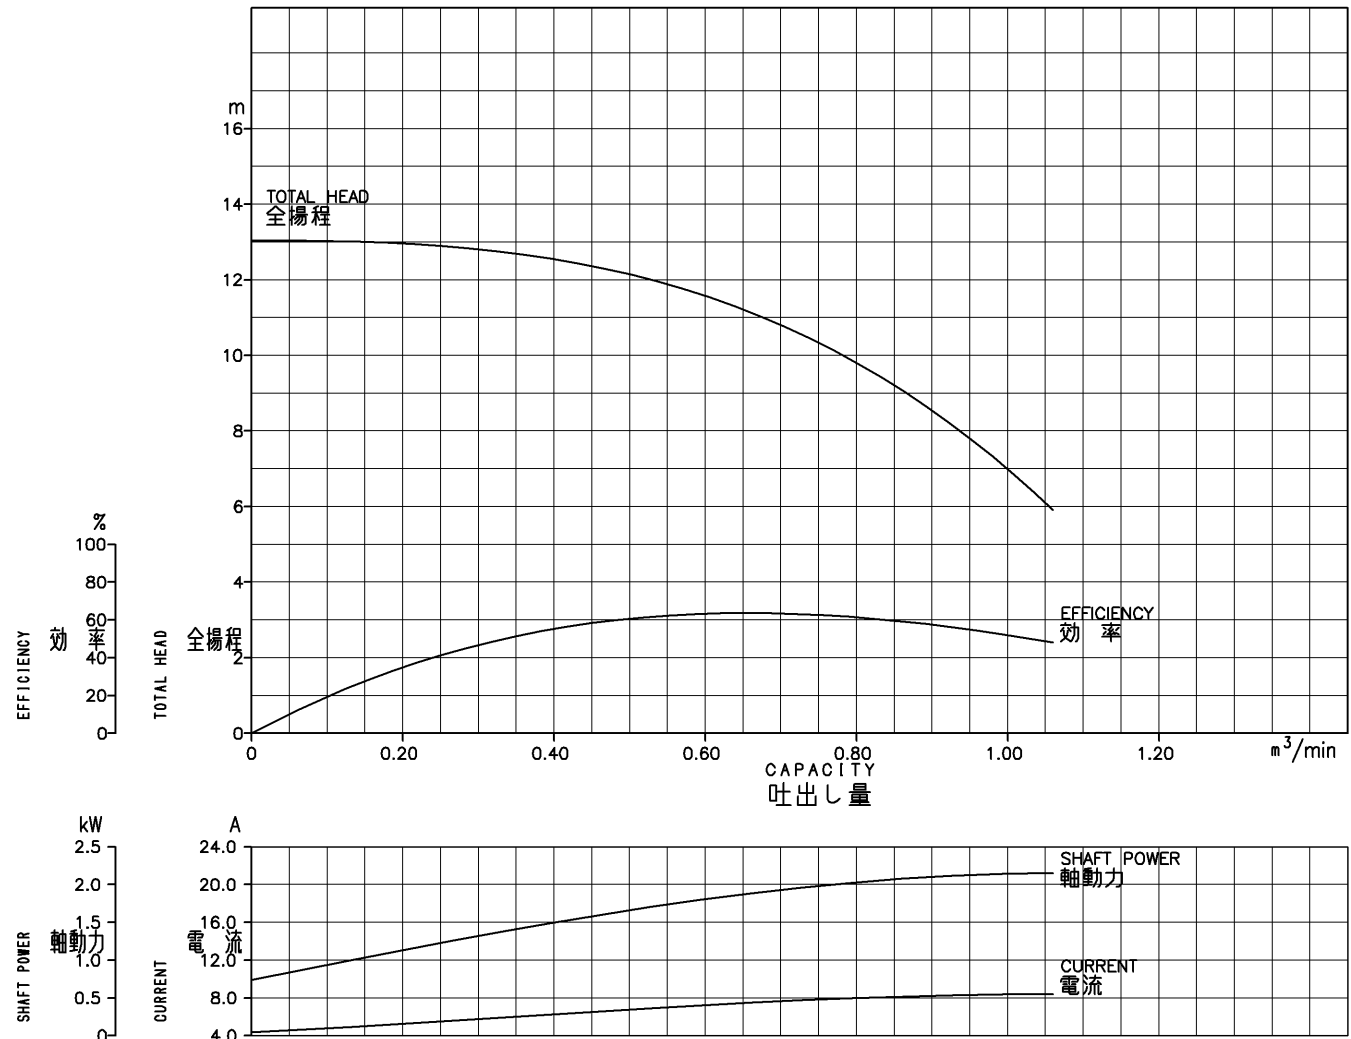

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.20	0.45	0.70	0.90	1.05	—	—	—
PUMP	全揚程	TOTAL HEAD	m	13.1	13.0	12.4	10.8	8.5	6.1	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.42	0.91	1.23	1.25	1.04	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	37.4	57.4	63.8	59.6	48.5	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	4.35	5.26	6.53	7.65	8.23	8.39	—	—	—
MOTOR	入力	INPUT	kW	0.83	1.25	1.74	2.14	2.33	2.39	—	—	—
MOTOR	出力	OUTPUT	kW	0.74	1.13	1.58	1.93	2.10	2.15	—	—	—
PUMP	仕様	吐出し量CAPACITY	m³/min				性能	吐出し量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min⁻¹	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	2.2 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1745 min⁻¹		電流	CURRENT	8.8 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		