




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-100MW5.5-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

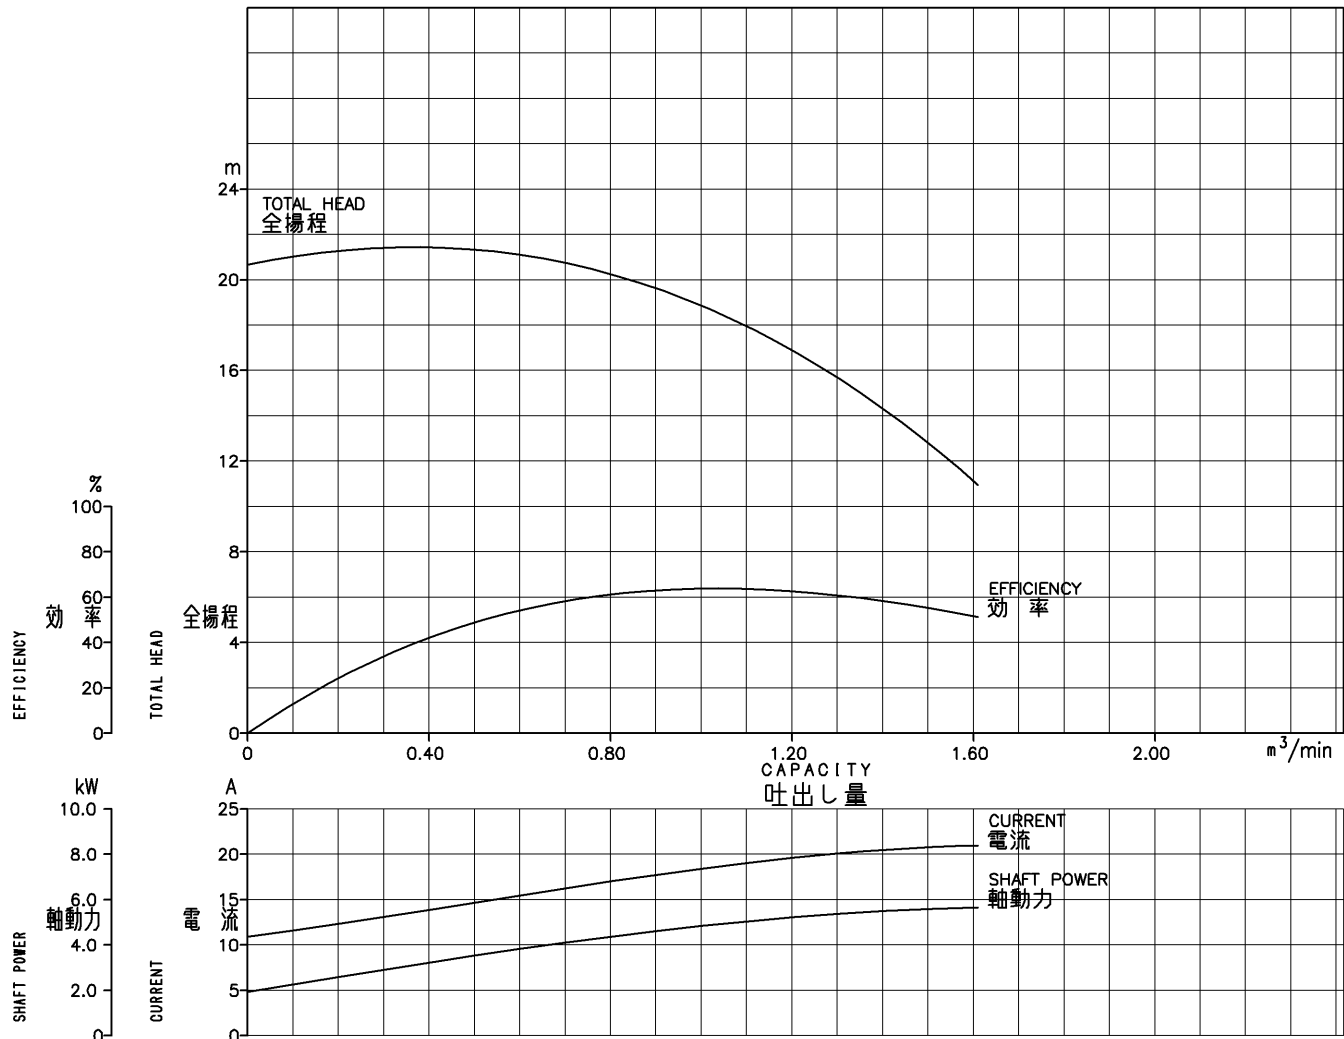

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY m^3/min	0	0.40	0.71	1.10	1.40	1.60	—	—	—	—
PUMP	全揚程	TOTAL HEAD m	20.7	21.4	20.7	18.0	14.3	11.1	—	—	—	—
PUMP	理論動力	WATER POWER kW	0.00	1.40	2.40	3.22	3.27	2.90	—	—	—	—
PUMP	ポンプ効率	PUMP EFF. %	0.0	43.3	58.0	63.8	59.5	51.4	—	—	—	—
MOTOR	電圧	VOLTAGE V	200	200	200	200	200	200	—	—	—	—
MOTOR	電流	CURRENT A	10.9	13.9	16.3	19.1	20.5	21.0	—	—	—	—
MOTOR	入力	INPUT kW	2.13	3.49	4.46	5.46	5.97	6.14	—	—	—	—
MOTOR	出力	OUTPUT kW	1.94	3.23	4.13	5.04	5.50	5.65	—	—	—	—
PUMP	仕様	吐出し量CAPACITY m^3/min					性能	吐出し量CAPACITY m^3/min				
PUMP	REQU.	全揚程TOTAL HEAD m					PERF. W.	全揚程TOTAL HEAD m				
PUMP	ポンプ口径	PUMP SIZE 100mm	羽根径 IMP. DIA. mm				同期回転速度 SYNC. SPEED OF ROTATION $1800min^{-1}$					
MOTOR	型式	MODEL SF-PR	出力 OUTPUT 5.5kW				相・電圧 PHASE-VOLT. 3φ 200V					
MOTOR	極数・周波数	POLE-FREQ. 4P 60Hz	回転速度 SPEED OF ROTATION $1760min^{-1}$				電流 CURRENT 20.8A					
MOTOR	製造者	MANUFACT. MITSUBISHI					電動機CD MOTOR CD					