


BL形

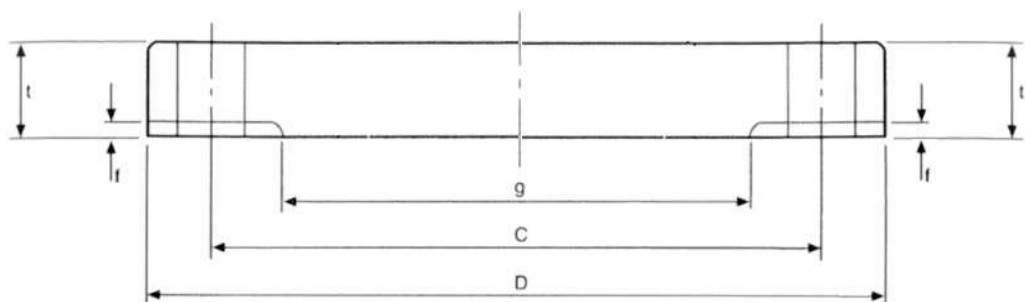

寸法 規格	適用管の 外 径	D	C	f	g	t	ボルト穴数	φ
15A	21.7	95	70	1	51	12	4	15
20A	27.2	100	75	1	56	14	4	15
25A	34.0	125	90	1	67	14	4	19
32A	42.7	135	100	2	76	16	4	19
40A	48.6	140	105	2	81	16	4	19
50A	60.5	155	120	2	96	16	4	19
65A	76.3	175	140	2	116	18	4	19
80A	89.1	185	150	2	126	18	8	19
90A	101.6	195	160	2	136	18	8	19
100A	114.3	210	175	2	151	18	8	19
125A	139.8	250	210	2	182	20	8	23
150A	165.2	280	240	2	212	22	8	23
200A	216.3	330	290	2	262	22	12	23
250A	267.4	400	355	2	324	24	12	25
300A	318.5	445	400	3	368	24	16	25
350A	355.6	490	445	3	413	26	16	25
400A	406.4	560	510	3	475	28	16	27
450A	457.2	620	565	3	530	30	20	27
500A	508.0	675	620	3	585	30	20	27
550A	558.8	745	680	3	640	34	20	33
600A	609.6	795	730	3	690	36	24	33

名 称

10K BL形フランジ



A.M.T.株式会社

〒501-0413 岐阜県本巣市見延1430-8
TEL: 058-323-1545 FAX: 058-323-0466

図面番号

BL-10-A-1