
図面/規格 【皿ばね座金(ねじ用)SDW】

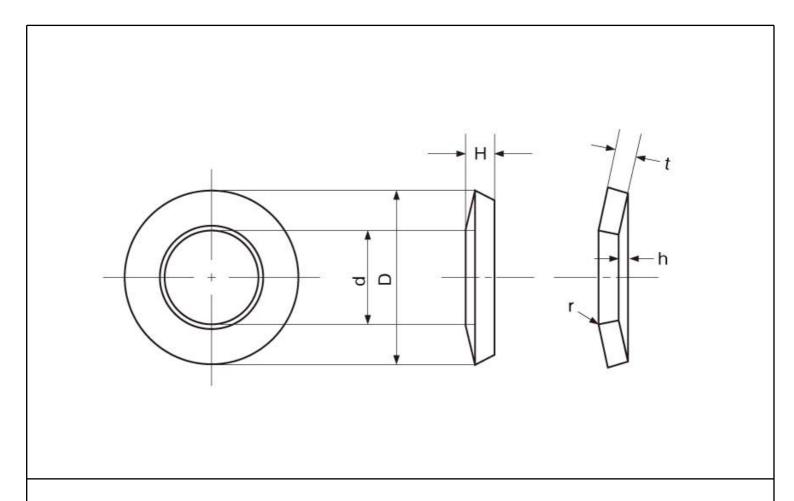

単位 mm

呼び	内径 d		外径 D		厚さ t		基準高さ	試験荷重
	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差	Н	(kN)
SDW- M3	3.15	+0.25 0	7.0	±0.20	0.40	±0.03	0.60	1.03
SDW- M4	4.25		9.0		0.50	±0.035	0.80	1.77
SDW- M5	5.25		11.0		0.60	±0.04	1.00	2.94
SDW- M6	6.40	+0.30 0	13.0	±0.25	0.70		1.20	4.12
SDW- M8	8.40		16.0		0.90	±0.05	1.50	7.45
SDW- M10	10.60		20.0		1.20	±0.06	1.95	11.77
SDW- M12	12.60		24.0		1.40	±0.07	2.30	17.65
SDW-1/2"	13.30	+0.40 0	26.0	±0.30	1.40		2.40	12.75
SDW- M14	14.60		28.0		1.60	±0.08	2.70	23.54
SDW- M16	16.90		31.5		1.80	±0.085	3.00	32.36
SDW- M18	18.90		35.0		2.00	±0.09	3.30	39.23
SDW- M20	20.90		38.0		2.20		3.60	49.03
SDW- M22	22.90	+0.50 0	41.0	±0.35	2.50	±0.10	4.00	61.78
SDW- M24	25.20		46.0		2.70		4.40	71.59
SDW-1"	26.60		50.0		3.00		4.80	56.88
SDW- M30	31.00	+0.40 0	56.0	0 -0.70	3.55	±0.11	5.50	117.68
SDW- M36	37.50	+0.50	70.0	6.7-22	5.00	1000	6.50	166.71