




形状1

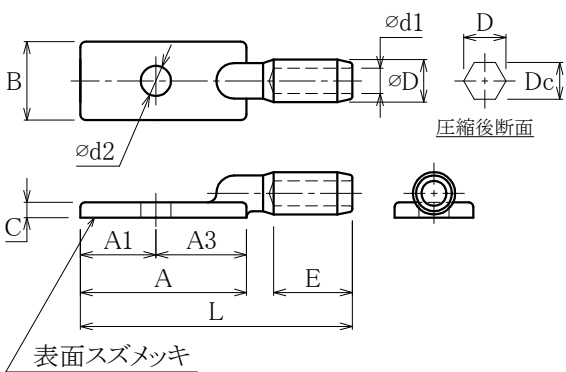


形状2

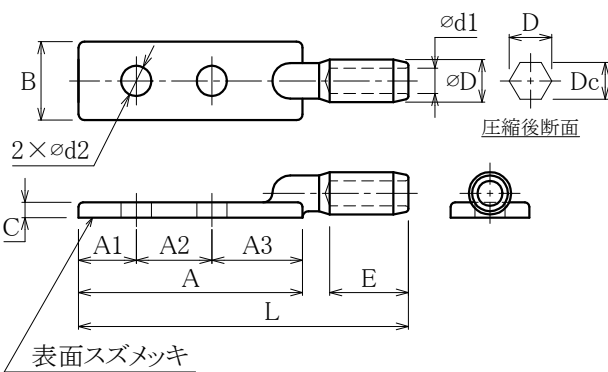

形状3

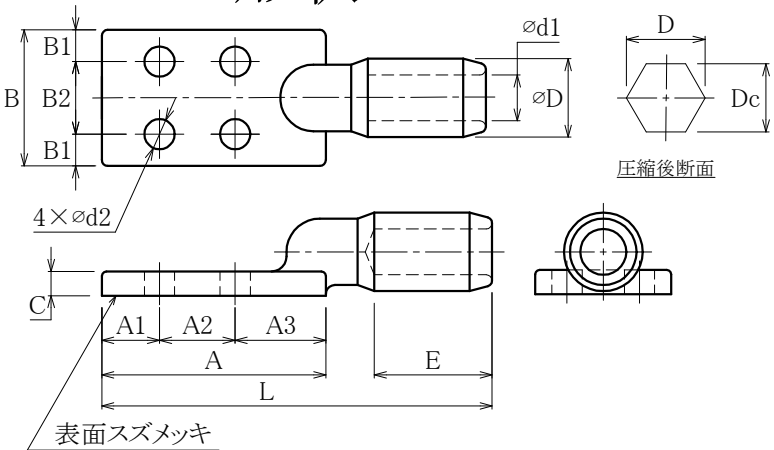

形状4

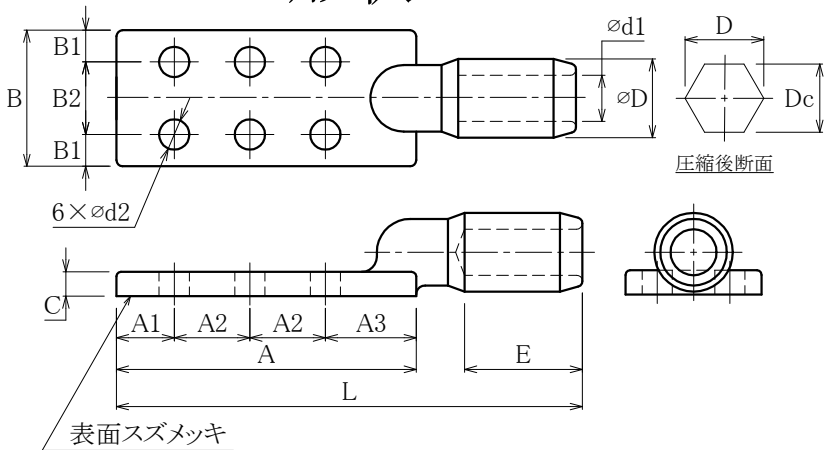

型番	適用電線			各部の寸法(mm)														使用ボルト		圧縮使用 ダイス 対角寸法 (mm)	形状
	公称 断面積 (mm ²)	円より		D	d1	E	A	A1	A2	A3	B	B1	B2	C	d2	L	Dc	サイズ	本数		
		撚り線 構成 (本/mm)	撚り線 外径 (mm)																		
C1-14	14	7/1.6	4.8	14	5.2	26	55	25	—	30	40	—	—	5	14	90	12.1	M12	1	14	1
C1-22	22	7/2.0	6.0	14	6.4	26	55	25	—	30	40	—	—	5	14	90	12.1	M12	1	14	1
C1-38	38	7/2.6	7.8	14	8.3	26	55	25	—	30	40	—	—	5	14	90	12.1	M12	1	14	1
C1-55	55	7/3.2	9.6	19	10.2	30	55	25	—	30	40	—	—	5	14	94	16.5	M12	1	19	1
C1-60	60	19/2.0	10.0	19	10.6	30	55	25	—	30	40	—	—	5	14	94	16.5	M12	1	19	1
C2-14	14	7/1.6	4.8	14	5.2	26	90	18	40	32	40	—	—	5	14	125	12.1	M12	2	14	2
C2-22	22	7/2.0	6.0	14	6.4	26	90	18	40	32	40	—	—	5	14	125	12.1	M12	2	14	2
C2-38	38	7/2.6	7.8	14	8.3	26	90	18	40	32	40	—	—	5	14	125	12.1	M12	2	14	2
C2-55	55	7/3.2	9.6	19	10.2	30	90	18	40	32	40	—	—	6	14	135	16.5	M12	2	19	2
C2-60	60	19/2.0	10.0	19	10.6	30	90	18	40	32	40	—	—	6	14	135	16.5	M12	2	19	2
C2-75	75	7/3.7	11.1	23	11.7	39	95	20	40	35	50	—	—	8	14	150	19.9	M12	2	23	2
C2-80	80	19/2.3	11.5	23	12.1	39	95	20	40	35	50	—	—	8	14	150	19.9	M12	2	23	2
C2-100	100	19/2.6	13.0	23	13.6	39	95	20	40	35	50	—	—	8	14	150	19.9	M12	2	23	2
C2-125	125	19/2.6	14.5	26	15.2	39	95	20	40	35	50	—	—	8	14	150	22.5	M12	2	26	2
C2-150	150	37/2.3	16.1	29	16.9	44	110	25	40	45	50	—	—	10	14	170	25.1	M12	2	29	2
C2-200	200	37/2.6	18.2	32	19.5	53	110	25	40	45	50	—	—	10	14	180	27.7	M12	2	32	2
C2-250	250	61/2.3	20.7	38	21.9	62	110	25	40	45	50	—	—	10	14	207	32.9	M12	2	38	2
C2-325	325	61/2.6	23.4	42	24.7	62	110	25	40	50	50	—	—	10	14	212	36.4	M12	2	42	2
C4-325	325	61/2.6	23.4	42	24.7	62	115	25	40	50	75	17.5	40	10	14	212	36.4	M12	4	42	3
C4-400	400	61/2.9	26.1	47	27.4	70	115	25	40	50	75	17.5	40	12	14	222	40.7	M12	4	47	3
C4-500	500	61/3.2	28.8	47	30.2	70	115	25	40	50	75	17.5	40	12	14	222	40.7	M12	4	47	3
C6-600	600	91/2.9	31.9	51	33.3	70	155	25	40	50	75	17.5	40	12	14	262	44.2	M12	6	51	4
C6-725	725	91/3.2	35.2	56	36.7	90	190	30	50	60	100	25	50	12	18	325	48.5	M16	6	56	4
C6-800	800	127/2.8	36.4	56	38.0	90	190	30	50	60	100	25	50	12	18	325	48.5	M16	6	56	4
C6-850	850	127/2.9	37.7	56	39.3	90	190	30	50	60	100	25	50	12	18	325	48.5	M16	6	56	4
C6-1000	1000	127/3.2	41.6	64	43.2	100	190	30	50	60	100	25	50	14	18	335	55.4	M16	6	64	4

材質：C1100B

品名	圧縮端子	品番	C6-1000
東 神 電 気 株 式 会 社			