




TYPE 名称	清水用多段渦巻ポンプ	MODEL 型式	TVMK2-405E2.2-P	FUREQUENCY 周波数	50 Hz
------------	------------	-------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

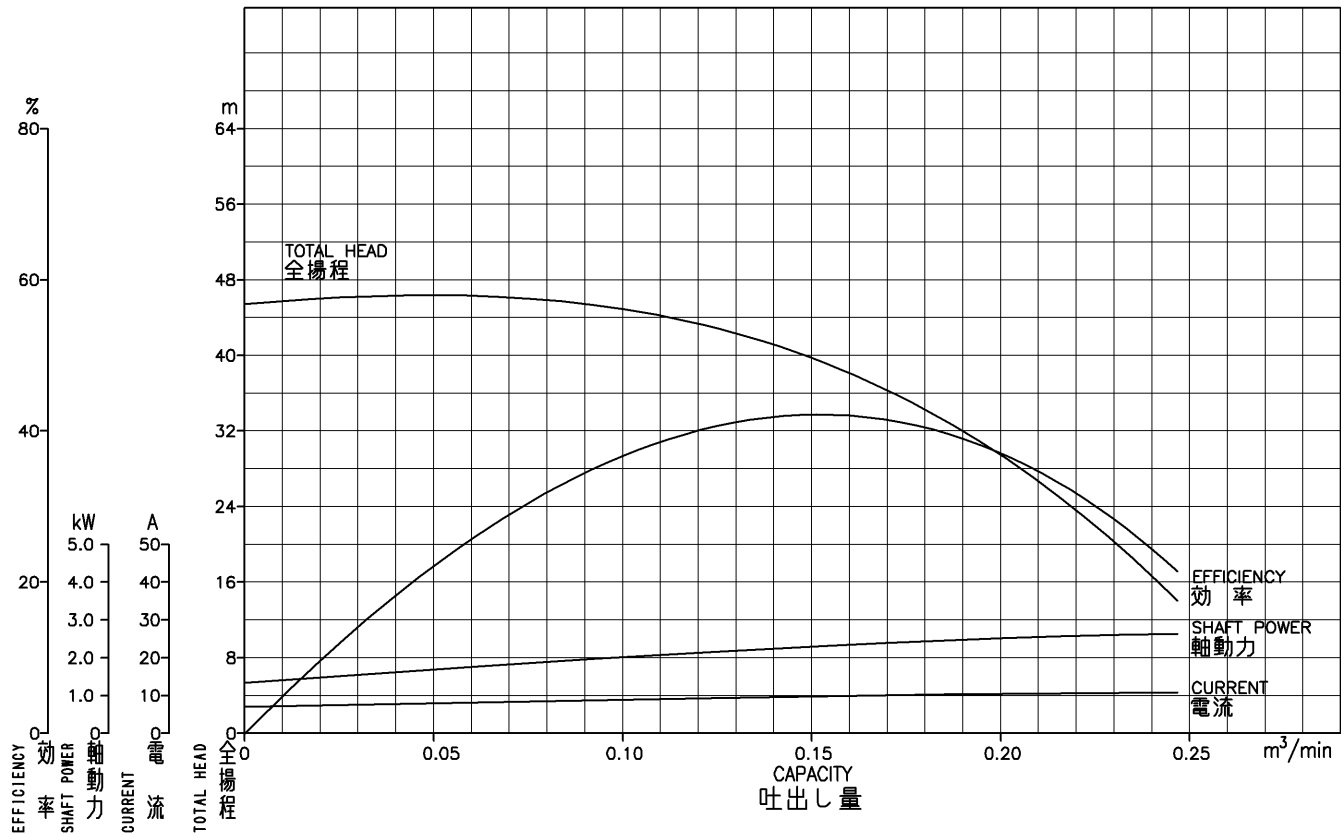

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.05	0.09	0.125	0.14	0.18	0.25	—	—
PUMP	全揚程	TOTAL HEAD	m	45.7	45.7	45.1	43.8	42.0	33.0	13.0	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.37	0.66	0.89	0.96	0.97	0.53	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	22.1	33.8	41.2	42.6	39.7	20.1	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	200	—	—
MOTOR	電流	CURRENT	A	7.0	7.9	8.7	9.3	9.6	10.2	10.9	—	—
MOTOR	入力	INPUT	kW	1.52	1.91	2.21	2.46	2.55	2.78	3.02	—	—
MOTOR	出力	OUTPUT	kW	1.33	1.69	1.96	2.17	2.25	2.44	2.64	—	—

備考	NOTE	承認者APPRO.	作成者DRAW.

PUMP	仕様	吐出し量CAPACITY	m³/min	性能	吐出し量CAPACITY	m³/min
PUMP	REQU.	全揚程TOTAL HEAD	m	PERF.W.	全揚程TOTAL HEAD	m
PUMP	ポンプ口径	PUMP SIZE	40mm	羽根径	IMP. DIA.	172.5mm
PUMP	型式	MODEL	全閉外扇屋内形	出力	OUTPUT	2.2kW
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz	回転速度	SPEED OF ROTATION	1450min⁻¹
MOTOR	製造者	MANUFACT.		電動機CD	MOTOR CD	
				同期回転速度	SYNC. SPEED OF ROTATION	1500min⁻¹
				相・電圧	PHASE-VOLT.	3φ 200V
				電流	CURRENT	9.6A