




TYPE 名称	清水用多段渦巻ポンプ	MODEL 型式	TVMK2-806E15-P	FUREQUENCY 周波数	50 Hz
------------	------------	-------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

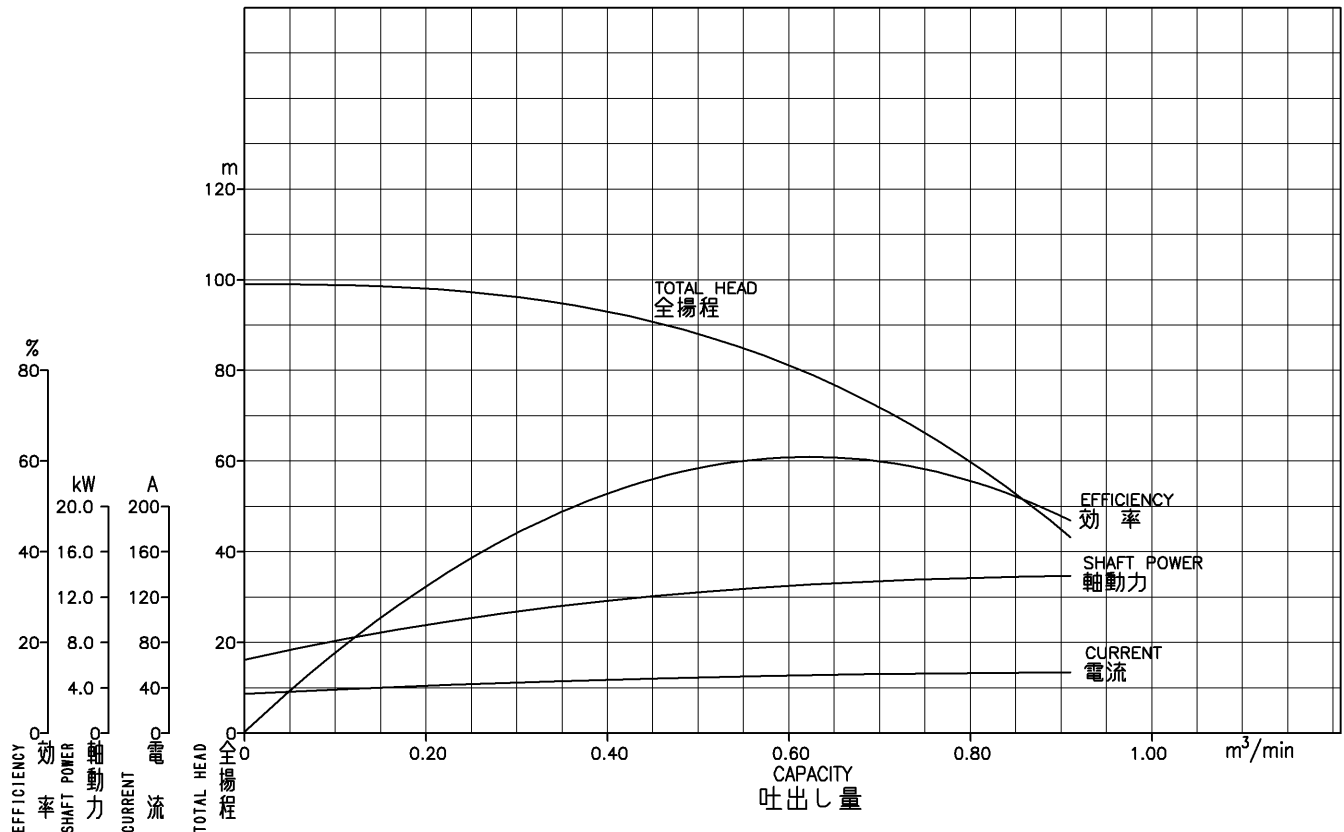

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.20	0.45	0.56	0.71	0.90	—	—	—
	全揚程	TOTAL HEAD	m	99.0	98.0	90.7	84.5	70.5	45.0	—	—	—
	理論動力	WATER POWER	kW	0.00	3.19	6.65	7.71	8.16	6.60	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	33.6	54.5	60.3	60.9	47.5	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	34.9	41.7	48.9	50.6	52.3	53.8	—	—	—
	入力	INPUT	kW	7.12	10.26	13.14	13.79	14.43	14.98	—	—	—
	出力	OUTPUT	kW	6.50	9.50	12.20	12.80	13.40	13.90	—	—	—

備考	NOTE	承認者 APPRO.	作成者 DRAW.

PUMP	仕様	吐出し量 CAPACITY	m³/min		性能	吐出し量 CAPACITY	m³/min	
	REQU.	全揚程 TOTAL HEAD	m		PERF. W.	全揚程 TOTAL HEAD	m	
MOTOR	ポンプ口径	PUMP SIZE	80 mm	羽根径	IMP. DIA.	217 mm	同期回転速度	SYNC. SPEED OF ROTATION
	型式	MODEL	全閉外扇屋内形	出力	OUTPUT	15 kW	相・電圧	PHASE-VOLT.
	極数・周波数	POLE-FREQ.	4P 50Hz	回転速度	SPEED OF ROTATION	1465 min⁻¹	電流	CURRENT
製造者	MANUFACT.						電動機 CD	MOTOR CD