




TYPE 名称	清水用多段渦巻ポンプ	MODEL 型式	TVMK2-408W5.5-P	FUREQUENCY 周波数	60 Hz
------------	------------	-------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

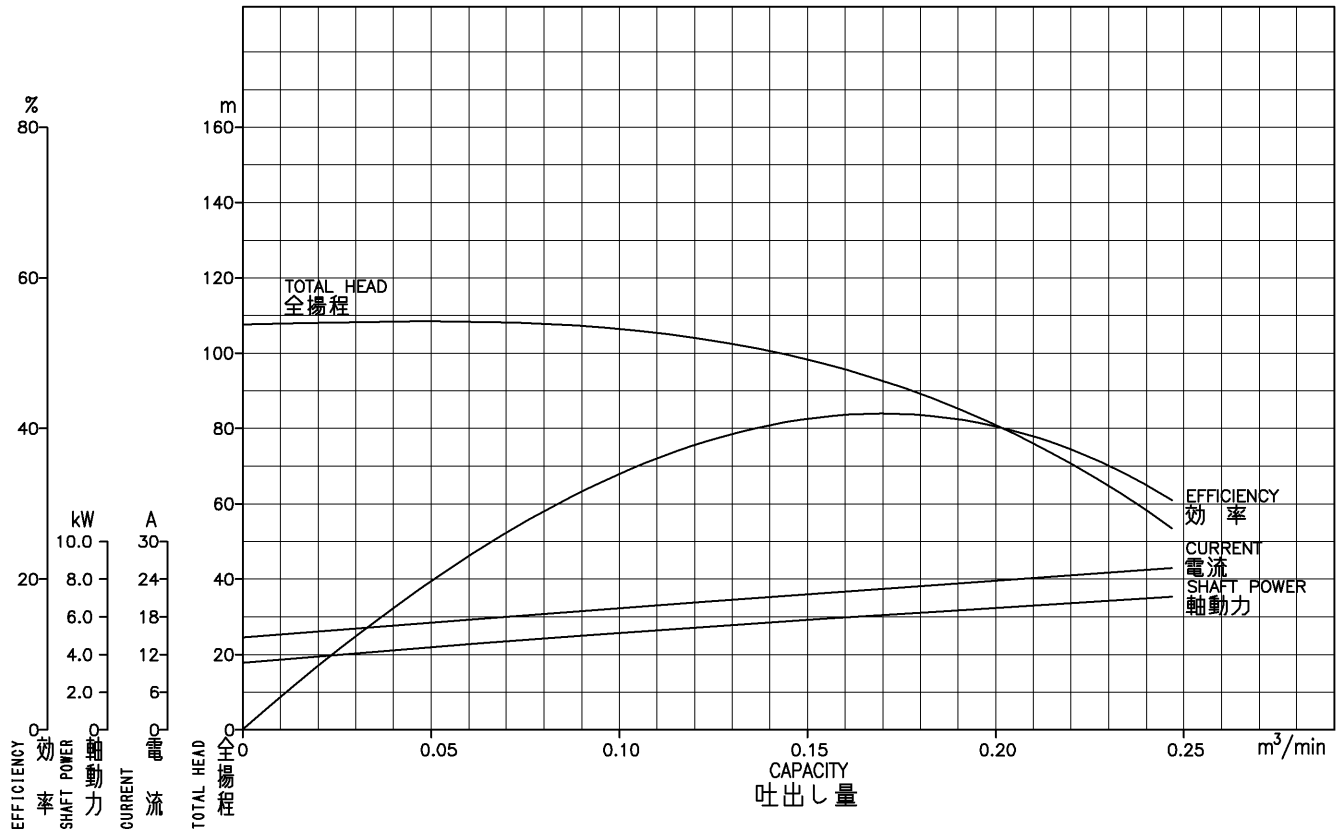

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.05	0.10	0.13	0.16	0.20	0.25	—	—
	全揚程	TOTAL HEAD	m	107.7	108.1	105.9	103.6	96.0	80.0	51.5	—	—
	理論動力	WATER POWER	kW	0.00	0.88	1.73	2.20	2.50	2.61	2.10	—	—
	ポンプ効率	PUMP EFF.	%	0.0	20.1	33.5	39.4	42.0	40.3	29.5	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	200	—	—
	電流	CURRENT	A	14.7	17.0	19.4	20.7	22.0	23.7	26.0	—	—
	入力	INPUT	kW	3.84	4.73	5.59	6.05	6.50	7.08	7.83	—	—
	出力	OUTPUT	kW	3.56	4.38	5.16	5.57	5.96	6.48	7.12	—	—

備考 NOTE	承認者 APPRO.	作成者 DRAW.

PUMP	仕様	吐出し量 CAPACITY	m³/min		性能	吐出し量 CAPACITY	m³/min	
	REQ.	全揚程 TOTAL HEAD	m		PERF. M.	全揚程 TOTAL HEAD	m	
PUMP	ポンプ口径	PUMP SIZE	40mm	羽根径	IMP. DIA.	172.5mm	同期回転速度	SYNO. SPEED OF ROTATION
								1800min⁻¹
MOTOR	型式	MODEL	全閉外扇屋内形	出力	OUTPUT	5.5kW	相・電圧	PHASE-VOLT.
								3φ 200V
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz	回転速度	SPEED OF ROTATION	1760min⁻¹	電流	CURRENT
								20.8A
MOTOR	製造者	MANUFACT.					電動機 CD	MOTOR CD