




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-403E1.5-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

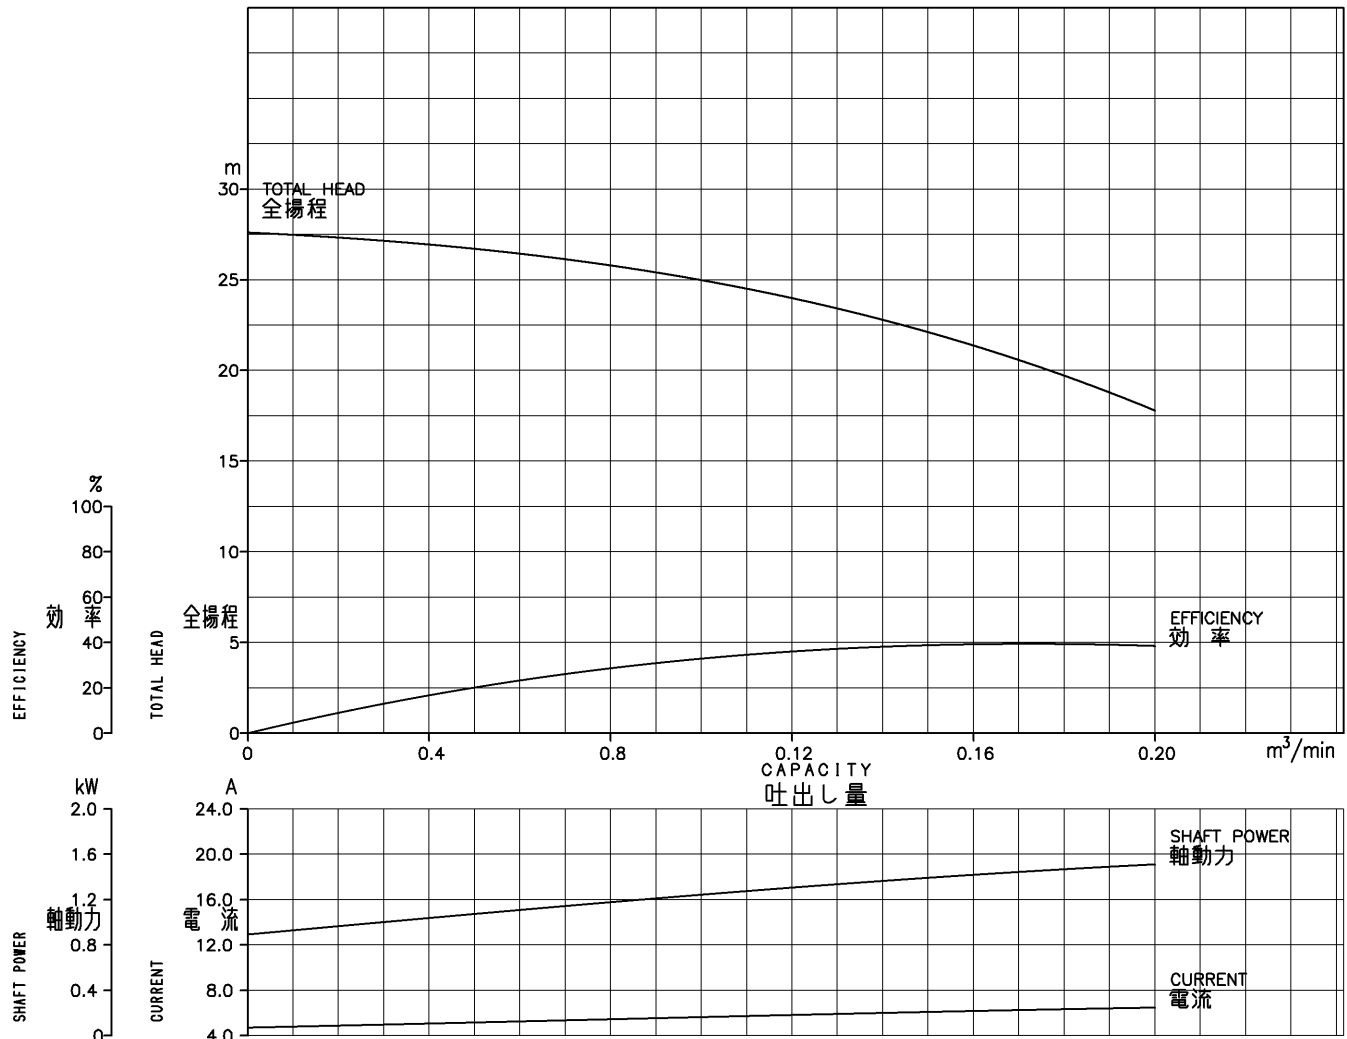

	番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m ³ /min	0	0.05	0.09	0.14	0.18	0.20	—	—	—	—
	全揚程	TOTAL HEAD	m	27.6	26.7	25.4	22.8	19.7	17.8	—	—	—	—
	理論動力	WATER POWER	kW	0.00	0.22	0.37	0.52	0.58	0.58	—	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	20.3	30.8	38.1	39.4	38.4	—	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—	—
	電流	CURRENT	A	4.70	5.16	5.53	6.00	6.33	6.47	—	—	—	—
	入力	INPUT	kW	1.03	1.23	1.39	1.56	1.69	1.74	—	—	—	—
	出力	OUTPUT	kW	0.89	1.07	1.21	1.36	1.47	1.51	—	—	—	—
PUMP	仕様	吐出し量CAPACITY	m ³ /min				性能	吐出し量CAPACITY	m ³ /min				
	REQU.	全揚程 TOTAL HEAD	m				PERF. W.	全揚程 TOTAL HEAD	m				
	ポンプ口径	PUMP SIZE	40mm	羽根径	IMP. DIA.	mm			同期回転速度	SYNC. SPEED OF ROTATION	1500min ⁻¹		
MOTOR	型式	MODEL	SF-PR	出力	OUTPUT	1.5kW			相・電圧	PHASE-VOLT.	3φ 200V		
	極数・周波数	POLE-FREQ.	4P 50Hz	回転速度	SPEED OF ROTATION	1450min ⁻¹			電流	CURRENT	6.6A		
	製造者	MANUFACT.	MITSUBISHI					電動機CD			MOTOR CD		