




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-503E2.2-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

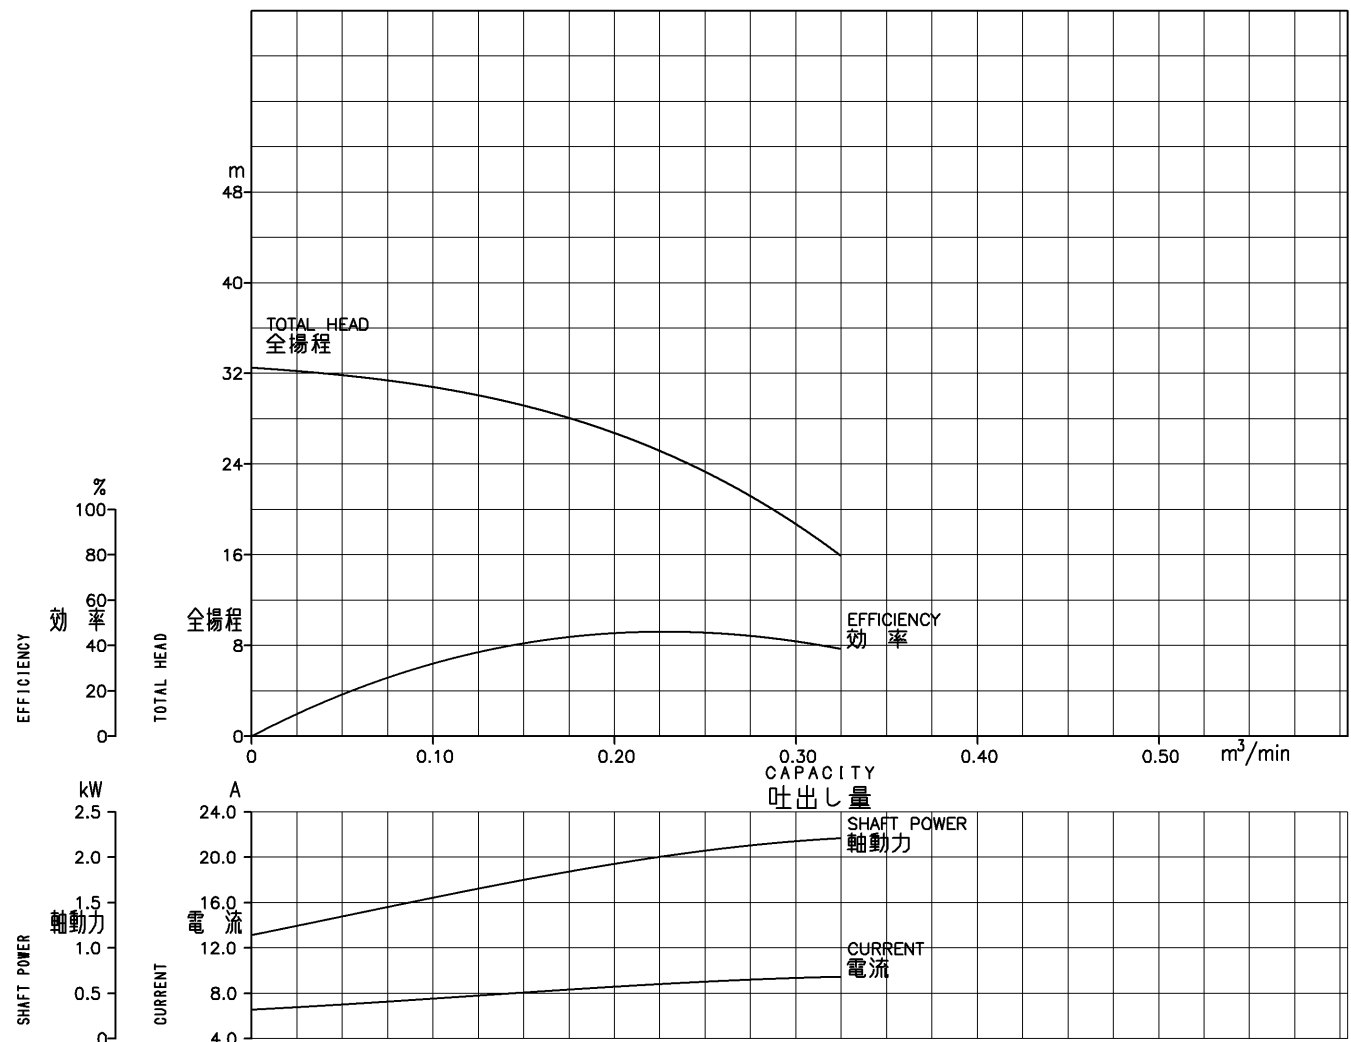

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m^3/min	0	0.10	0.18	0.225	0.28	0.32	—	—	—
	全揚程	TOTAL HEAD	m	32.5	30.8	27.8	25.2	20.7	16.5	—	—	—
	理論動力	WATER POWER	kW	0.00	0.50	0.82	0.92	0.94	0.86	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	32.3	43.8	46.1	44.1	39.0	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	6.55	7.53	8.38	8.81	9.23	9.44	—	—	—
	入力	INPUT	kW	1.31	1.76	2.10	2.27	2.42	2.50	—	—	—
	出力	OUTPUT	kW	1.14	1.55	1.86	2.00	2.14	2.20	—	—	—
PUMP	仕様	吐出し量CAPACITY	m^3/min				性能	吐出し量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	50 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	2.2 kW		相・電圧	PHASE-VOLT.	3 ϕ 200 V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50 Hz		回転速度	SPEED OF ROTATION	1450 min^{-1}		電流	CURRENT	9.6 A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		