




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-653E3.7-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

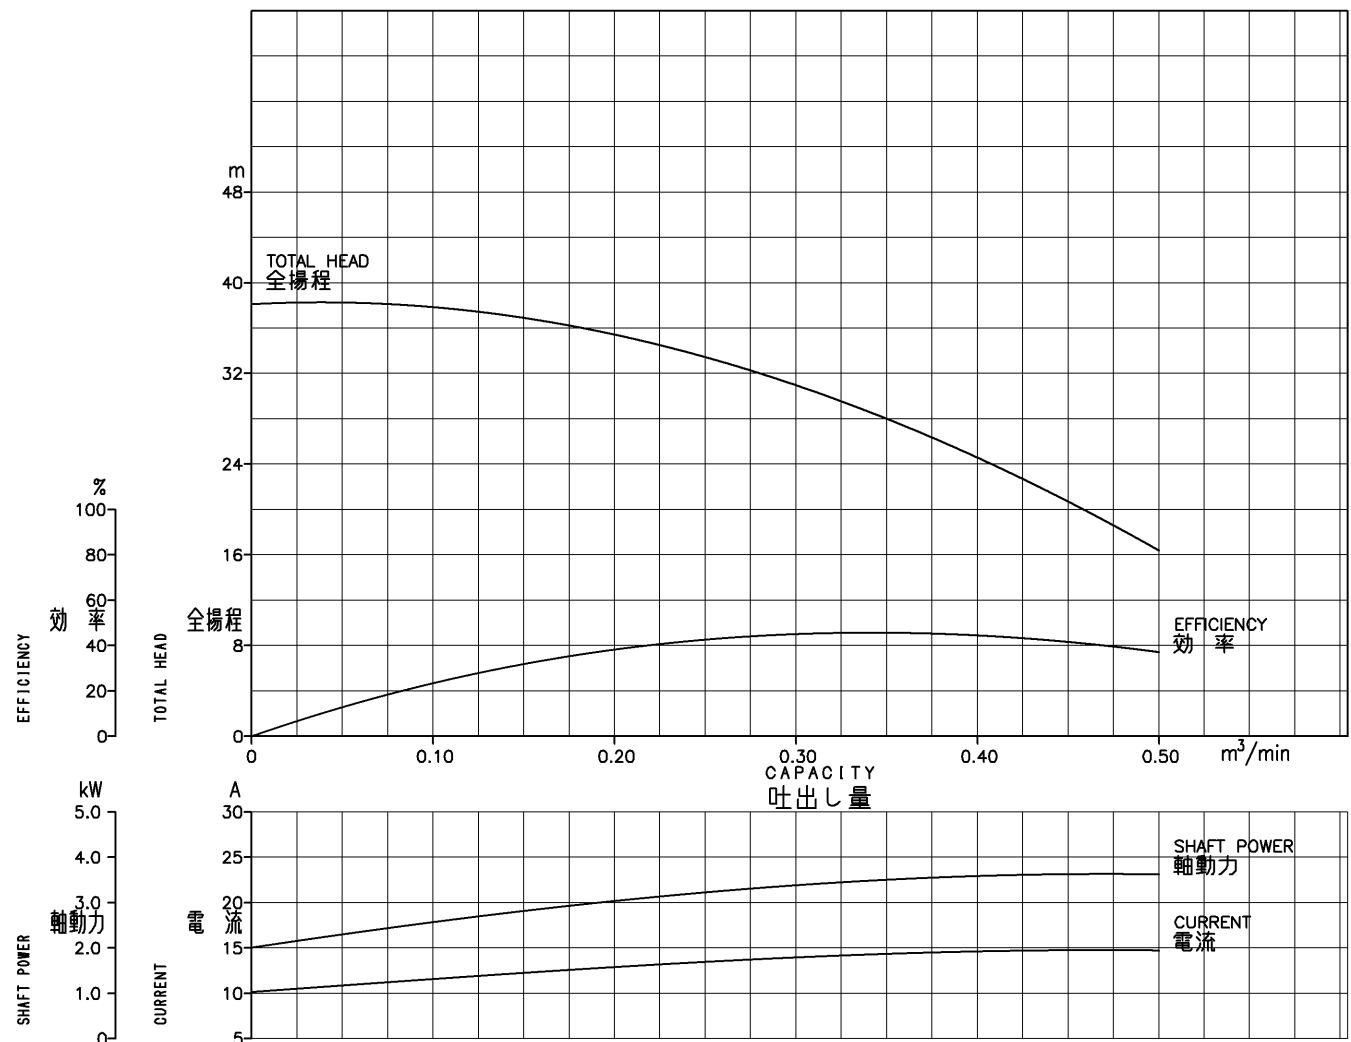

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.15	0.28	0.355	0.45	0.50	—	—	—
PUMP	全揚程	TOTAL HEAD	m	38.1	36.9	32.0	27.7	20.7	16.4	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.90	1.46	1.60	1.52	1.34	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	32.0	44.0	45.6	41.9	36.9	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	10.1	12.2	13.8	14.4	14.7	14.7	—	—	—
MOTOR	入力	INPUT	kW	2.24	3.13	3.71	3.93	4.06	4.05	—	—	—
MOTOR	出力	OUTPUT	kW	2.01	2.81	3.32	3.51	3.63	3.62	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	65 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	3.7 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1450 min^{-1}		電流	CURRENT	15.4 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		