




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-654E5.5-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

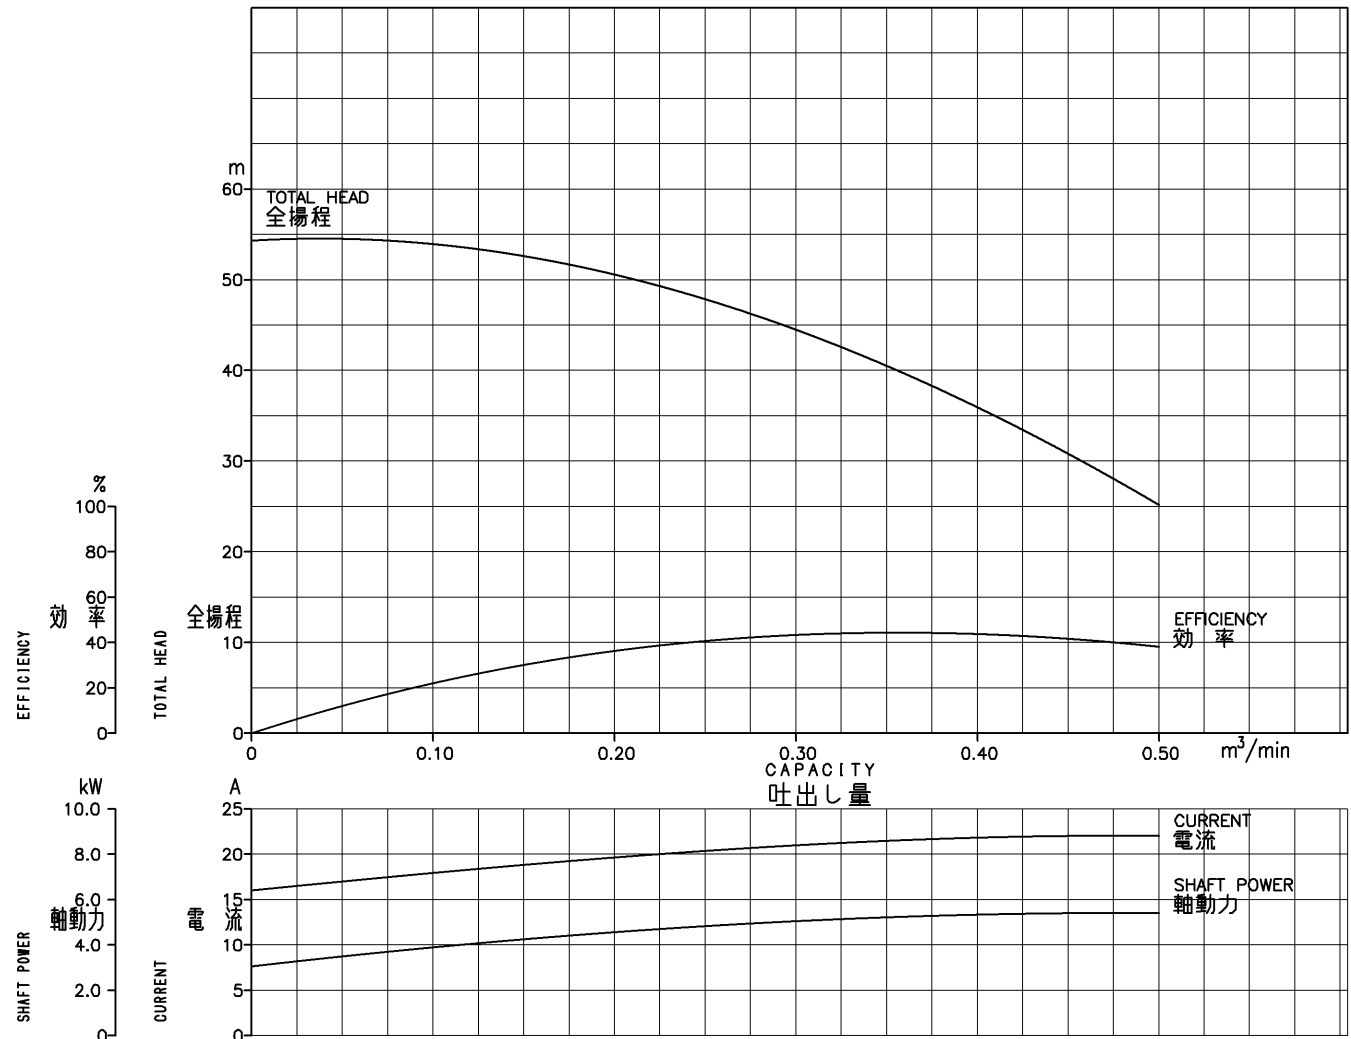

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.15	0.28	0.355	0.45	0.50	—	—	—
	全揚程	TOTAL HEAD	m	54.3	52.6	45.9	40.1	30.8	25.2	—	—	—
	理論動力	WATER POWER	kW	0.00	1.29	2.09	2.32	2.26	2.05	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	30.3	42.2	44.4	41.9	38.0	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	16.0	18.8	20.8	21.5	22.0	22.0	—	—	—
	入力	INPUT	kW	3.36	4.65	5.43	5.73	5.91	5.93	—	—	—
	出力	OUTPUT	kW	3.05	4.25	4.96	5.23	5.40	5.41	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	65 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	5.5 kW		相・電圧	PHASE-VOLT.	3 ϕ 200 V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50 Hz		回転速度	SPEED OF ROTATION	1465 min^{-1}		電流	CURRENT	22.6 A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		