




TYPE 名 称	清水用多段渦巻ポンプ	MODEL 型 式	TVMPK2-805E11-P	FUREQUENCY 周波数	50 Hz
-------------	------------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

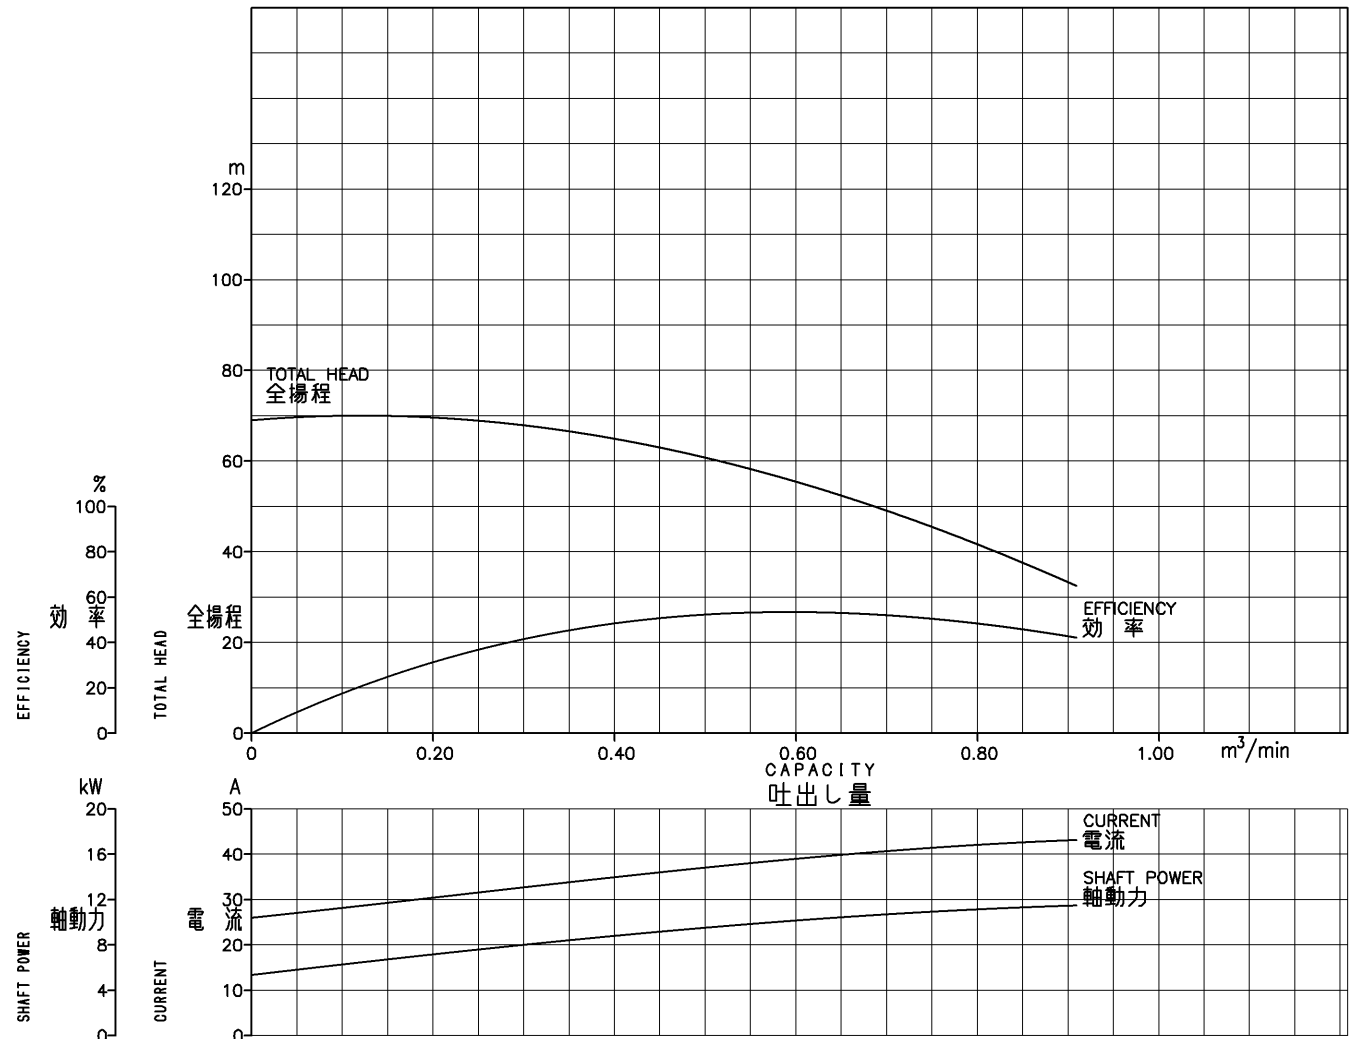

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m³/min	0	0.20	0.45	0.56	0.71	0.90	—	—	—
PUMP	全揚程	TOTAL HEAD	m	69.0	69.6	63.0	57.7	48.4	33.3	—	—	—
PUMP	理論動力	WATER POWER	kW	0.0	2.3	4.6	5.3	5.6	4.9	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	31.7	50.4	53.2	52.1	42.7	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	26.0	30.4	36.0	38.2	40.8	43.1	—	—	—
MOTOR	入力	INPUT	kW	5.8	7.7	9.9	10.7	11.6	12.4	—	—	—
MOTOR	出力	OUTPUT	kW	5.4	7.2	9.2	9.9	10.7	11.5	—	—	—
PUMP	仕様	吐出量CAPACITY	m³/min				性能	吐出量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500min⁻¹	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	11kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1465min⁻¹		電流	CURRENT	42A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		