




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-80LE0.75-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

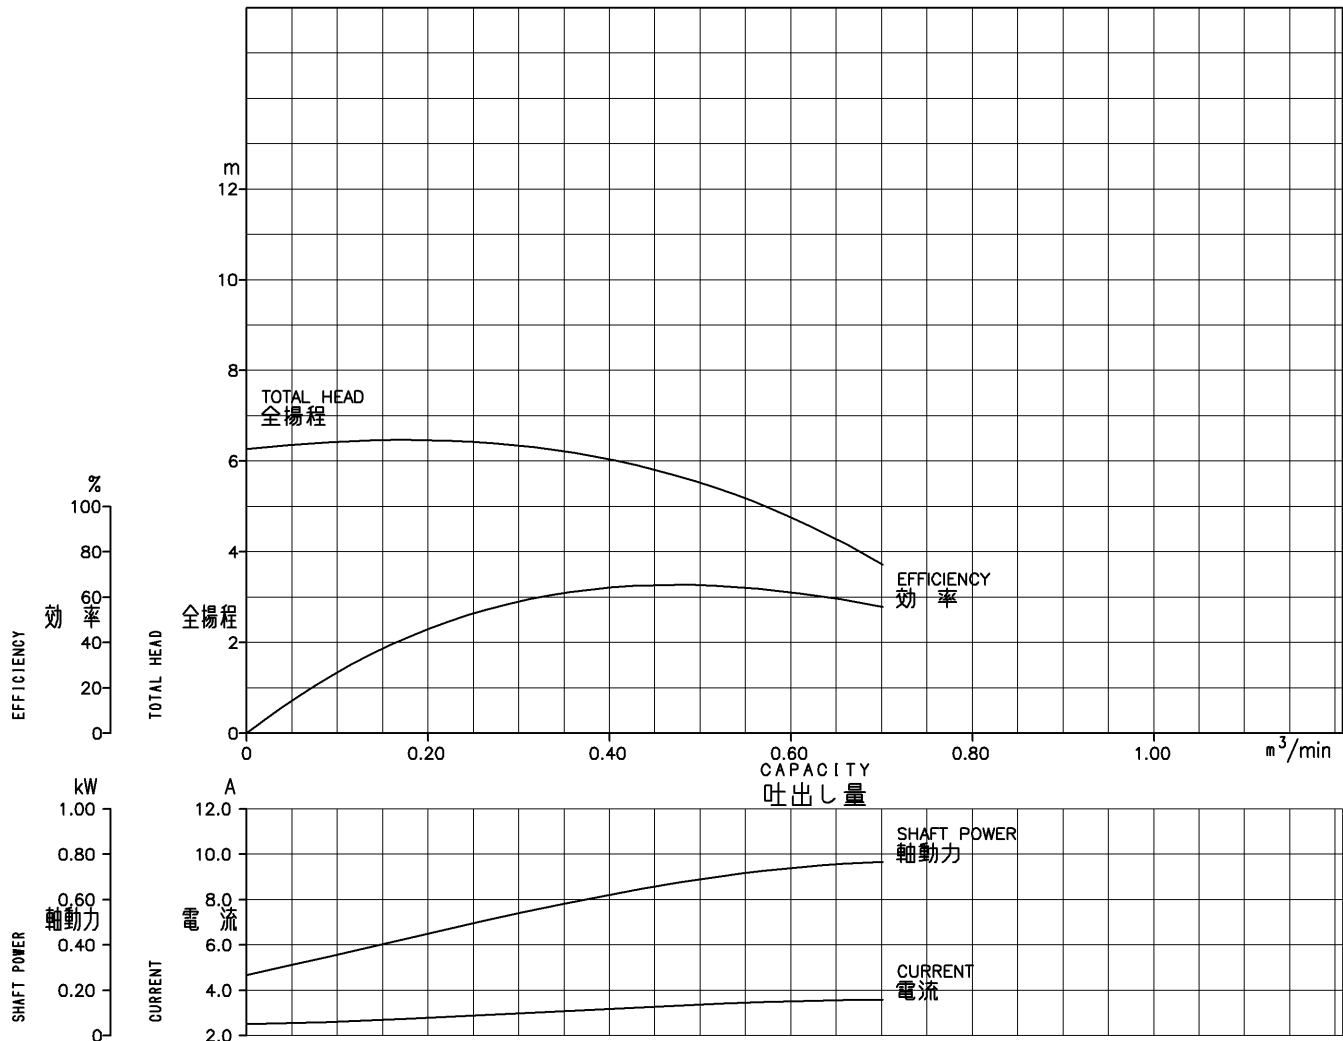

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.20	0.40	0.56	0.62	0.70	—	—	—
PUMP	全揚程	TOTAL HEAD	m	6.27	6.46	6.04	5.10	4.58	3.73	—	—	—
PUMP	理論動力	WATER POWER	kW	0.000	0.211	0.394	0.466	0.463	0.426	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	46.8	63.4	64.5	62.0	55.6	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	2.50	2.80	3.19	3.47	3.54	3.60	—	—	—
MOTOR	入力	INPUT	kW	0.34	0.541	0.739	0.861	0.891	0.915	—	—	—
MOTOR	出力	OUTPUT	kW	0.268	0.451	0.622	0.722	0.747	0.766	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF.W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
MOTOR	型式	MODEL	SF-PRO		出力	OUTPUT	0.75kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1420 min^{-1}		電流	CURRENT	3.6A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		