




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-80LE1.5-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

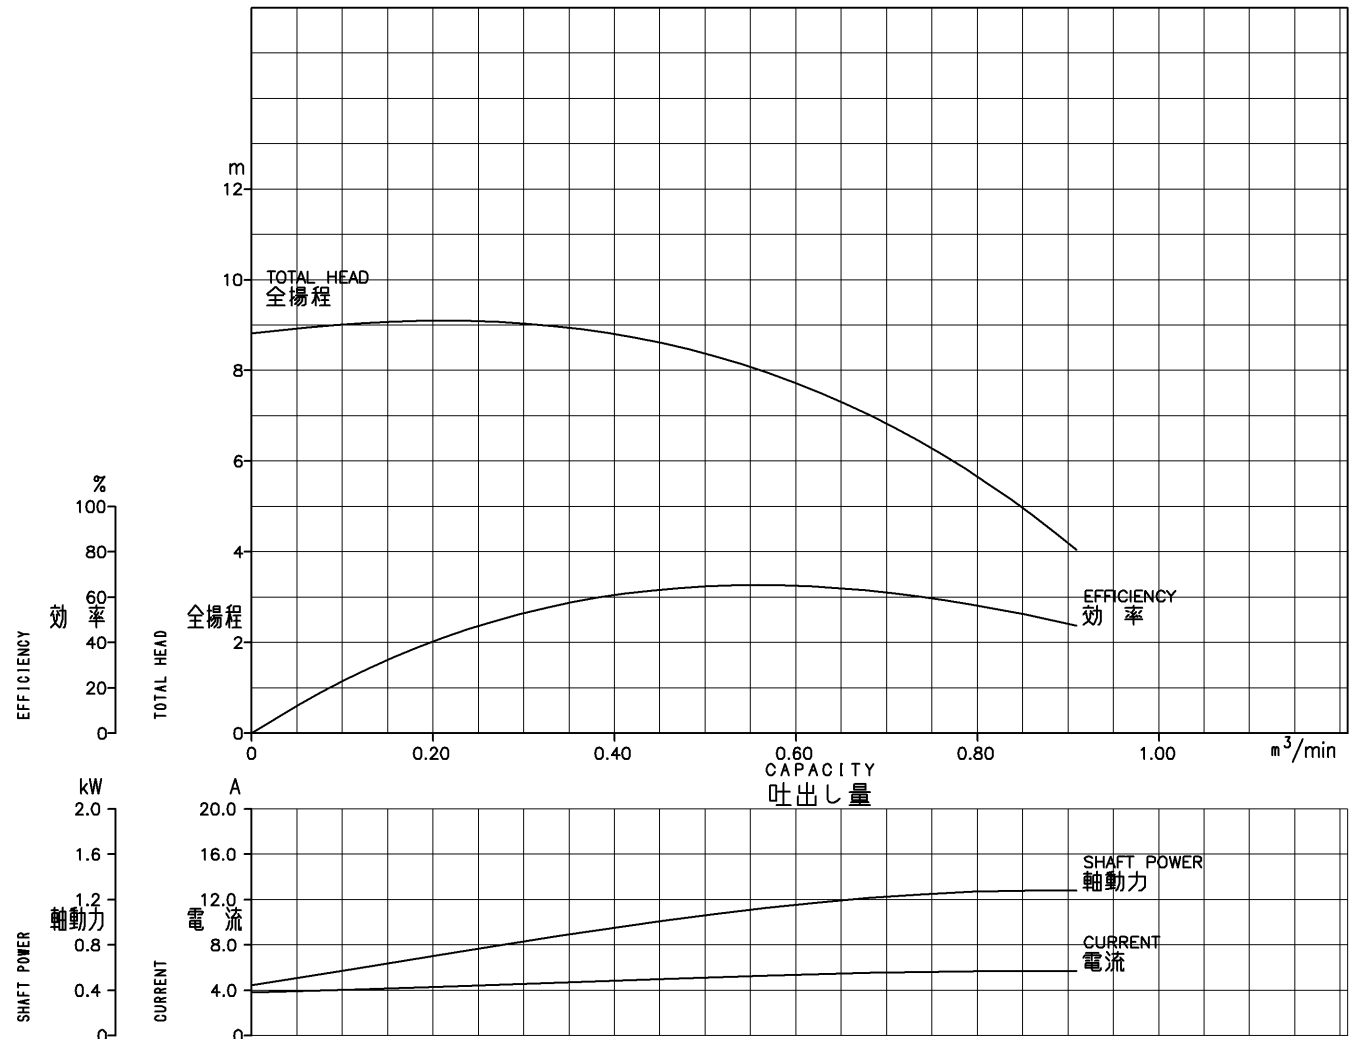

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.20	0.40	0.60	0.80	0.90	—	—	—
PUMP	全揚程	TOTAL HEAD	m	8.82	9.10	8.80	7.72	5.66	4.20	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.30	0.57	0.76	0.74	0.62	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	42.2	60.2	65.3	58.1	48.0	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	3.83	4.29	4.85	5.38	5.71	5.74	—	—	—
MOTOR	入力	INPUT	kW	0.55	0.82	1.10	1.33	1.46	1.47	—	—	—
MOTOR	出力	OUTPUT	kW	0.45	0.70	0.95	1.16	1.27	1.28	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	1.5 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1450 min^{-1}		電流	CURRENT	6.6 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		