




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-100HE5.5-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

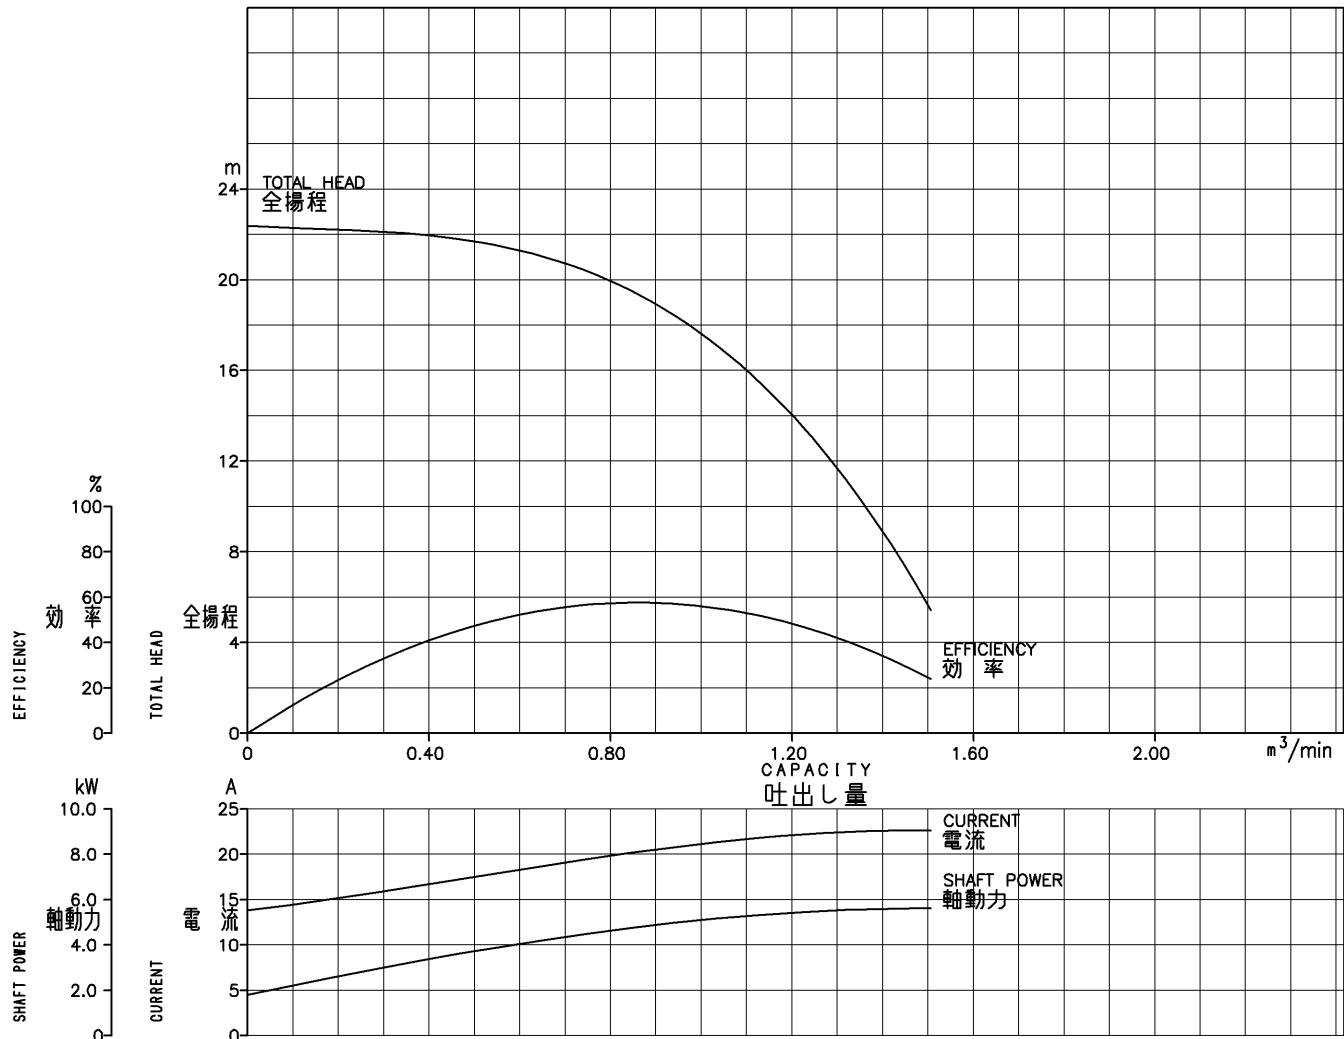

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.30	0.63	1.00	1.25	1.50	—	—	—
PUMP	全揚程	TOTAL HEAD	m	22.4	22.1	21.1	17.6	12.9	5.7	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	1.08	2.17	2.87	2.63	1.38	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	35.9	52.3	56.3	47.9	24.7	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	13.8	15.9	18.6	21.2	22.3	22.6	—	—	—
MOTOR	入力	INPUT	kW	2.06	3.32	4.54	5.59	6.02	6.16	—	—	—
MOTOR	出力	OUTPUT	kW	1.81	3.01	4.15	5.10	5.49	5.61	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	100mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500 min^{-1}	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	5.5kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1465 min^{-1}		電流	CURRENT	22.6A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		