




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-150LE7.5-P	FUREQUENCY 周波数	50 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

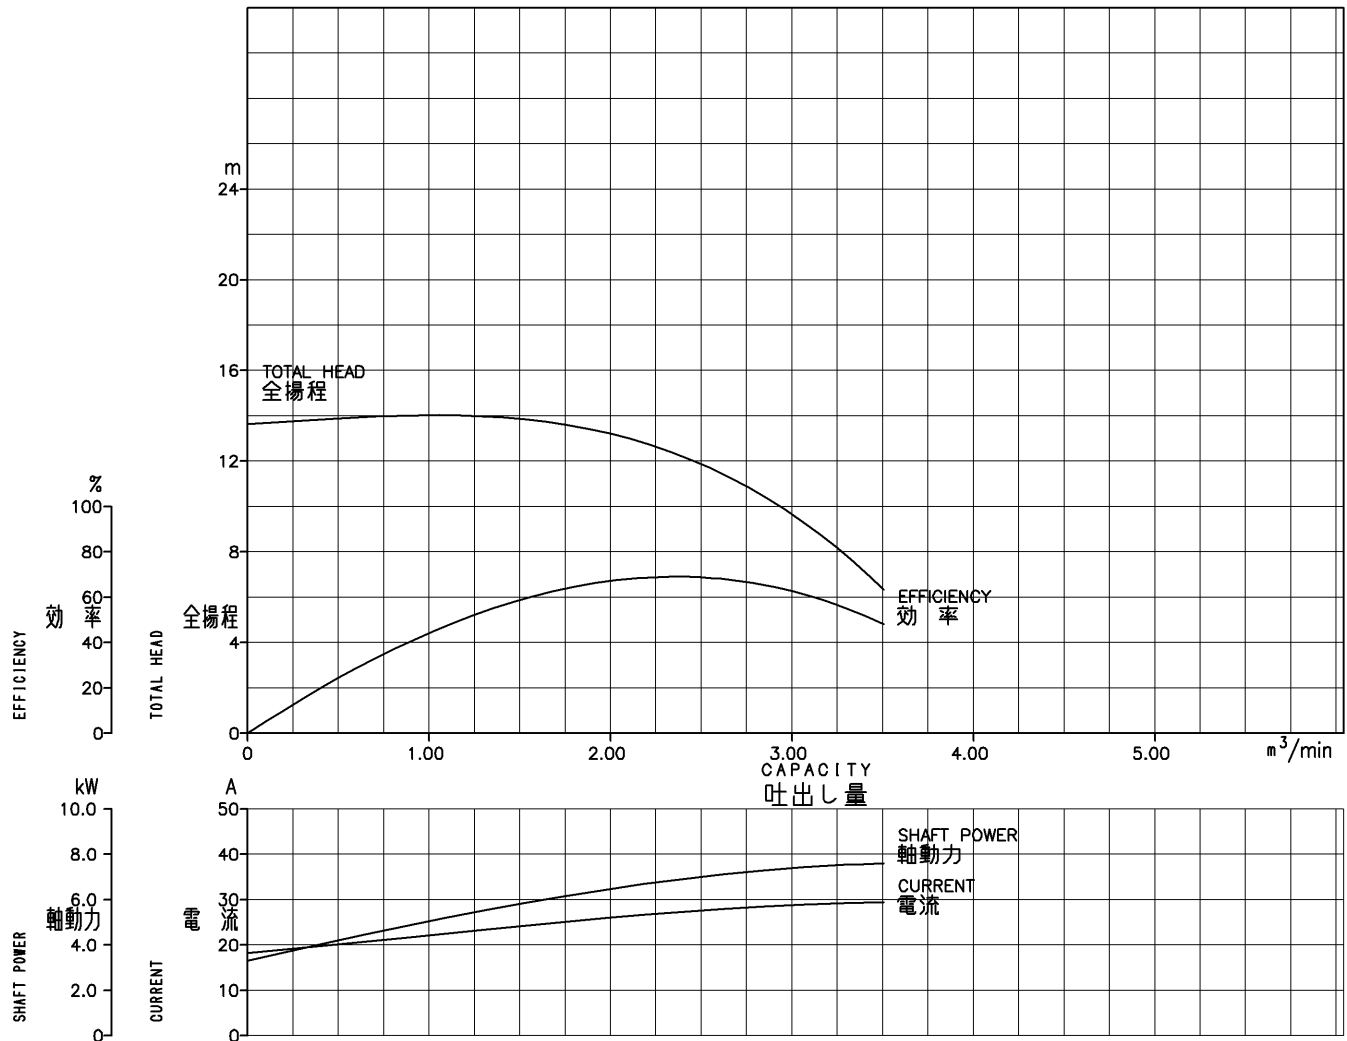

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m³/min	0	1.00	1.60	2.40	3.15	3.50	—	—	—
	全揚程	TOTAL HEAD	m	13.6	14.0	13.8	12.2	8.8	6.4	—	—	—
	理論動力	WATER POWER	kW	0.00	2.29	3.59	4.78	4.52	3.64	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	45.3	60.3	69.0	60.4	47.9	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	18.3	22.2	24.6	27.3	29.1	29.4	—	—	—
	入力	INPUT	kW	3.65	5.51	6.50	7.56	8.20	8.34	—	—	—
	出力	OUTPUT	kW	3.32	5.05	5.96	6.92	7.48	7.60	—	—	—
PUMP	仕様	吐出量CAPACITY	m³/min				性能	吐出量CAPACITY	m³/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	150mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1500min⁻¹	
	型式	MODEL	SF-PR		出力	OUTPUT	7.5kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 50Hz		回転速度	SPEED OF ROTATION	1460min⁻¹		電流	CURRENT	29.6A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		