




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-50MW1.5-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

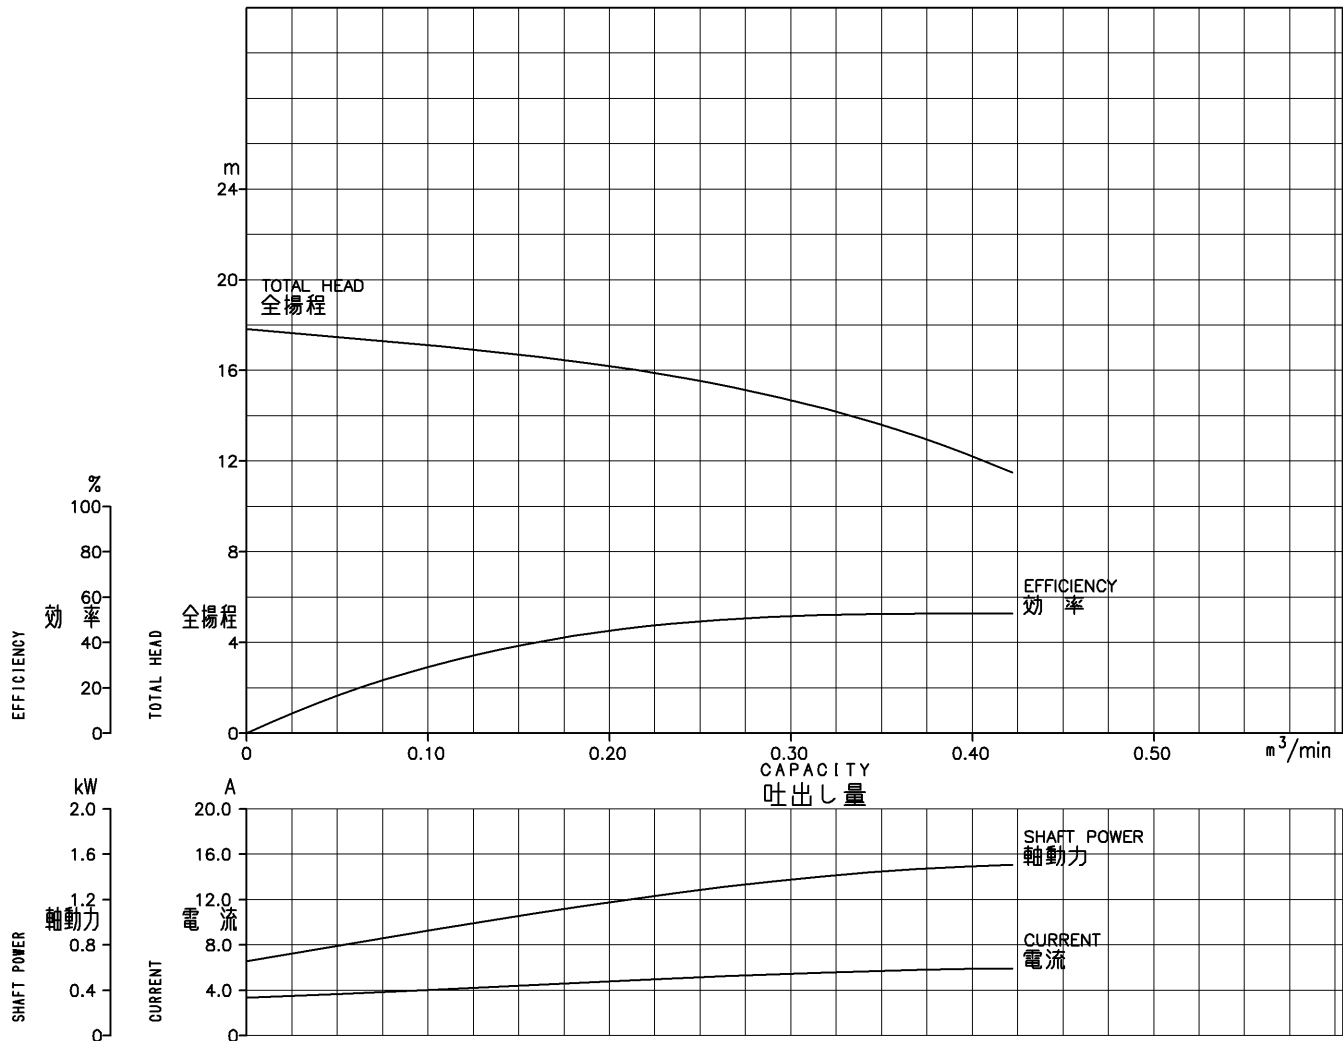

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	0.10	0.18	0.27	0.36	0.42	—	—	—
	全揚程	TOTAL HEAD	m	17.8	17.1	16.4	15.2	13.3	11.6	—	—	—
	理論動力	WATER POWER	kW	0.00	0.28	0.48	0.67	0.78	0.79	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	30.1	42.6	50.5	53.6	52.6	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	3.35	4.05	4.66	5.30	5.78	5.94	—	—	—
	入力	INPUT	kW	0.74	1.03	1.26	1.49	1.65	1.70	—	—	—
	出力	OUTPUT	kW	0.66	0.93	1.13	1.33	1.46	1.51	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	50 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	1.5 kW		相・電圧	PHASE-VOLT.	3φ 200 V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60 Hz		回転速度	SPEED OF ROTATION	1745 min^{-1}		電流	CURRENT	6 A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		