




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-80HW5.5-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

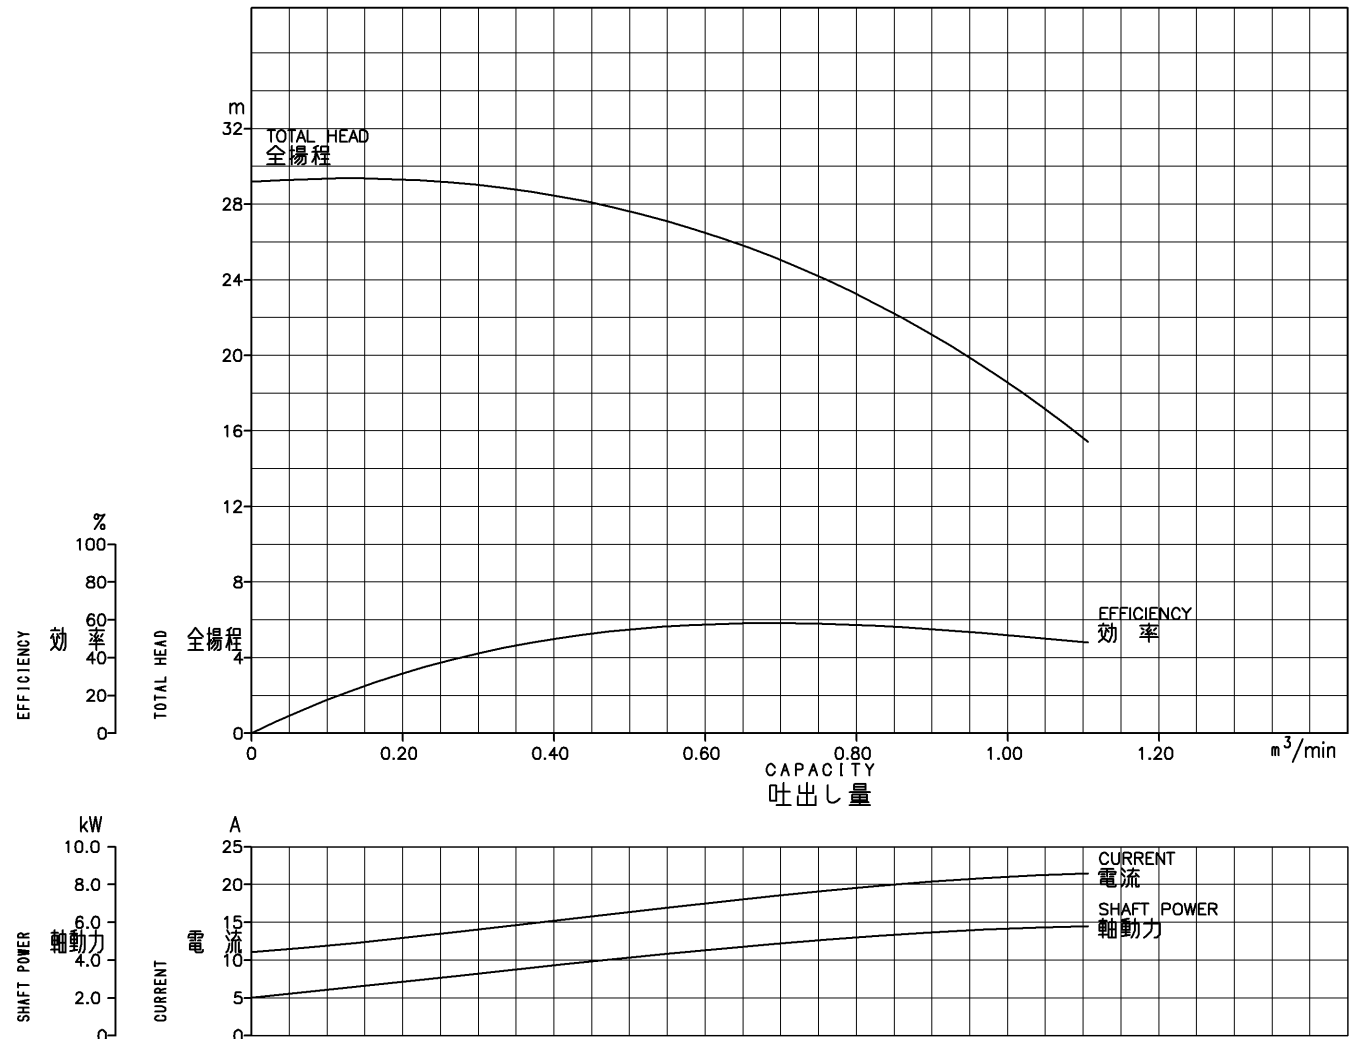

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出し量	CAPACITY	m³/min	0	0.20	0.45	0.70	0.90	1.10	—	—	—
PUMP	全揚程	TOTAL HEAD	m	29.2	29.3	28.1	25.0	21.1	15.6	—	—	—
PUMP	理論動力	WATER POWER	kW	0.00	0.96	2.06	2.86	3.09	2.80	—	—	—
PUMP	ポンプ効率	PUMP EFF.	%	0.0	33.5	52.3	58.4	56.5	48.3	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
MOTOR	電流	CURRENT	A	11.1	13.0	15.8	18.6	20.4	21.5	—	—	—
MOTOR	入力	INPUT	kW	2.20	3.09	4.25	5.30	5.94	6.31	—	—	—
MOTOR	出力	OUTPUT	kW	2.00	2.86	3.94	4.90	5.47	5.80	—	—	—
PUMP	仕様	吐出し量CAPACITY	m³/min				性能	吐出し量CAPACITY	m³/min			
PUMP	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
PUMP	ポンプ口径	PUMP SIZE	80 mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min⁻¹	
MOTOR	型式	MODEL	SF-PR		出力	OUTPUT	5.5 kW		相・電圧	PHASE-VOLT.	3φ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1760 min⁻¹		電流	CURRENT	20.8 A	
MOTOR	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		