




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-125HW15-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

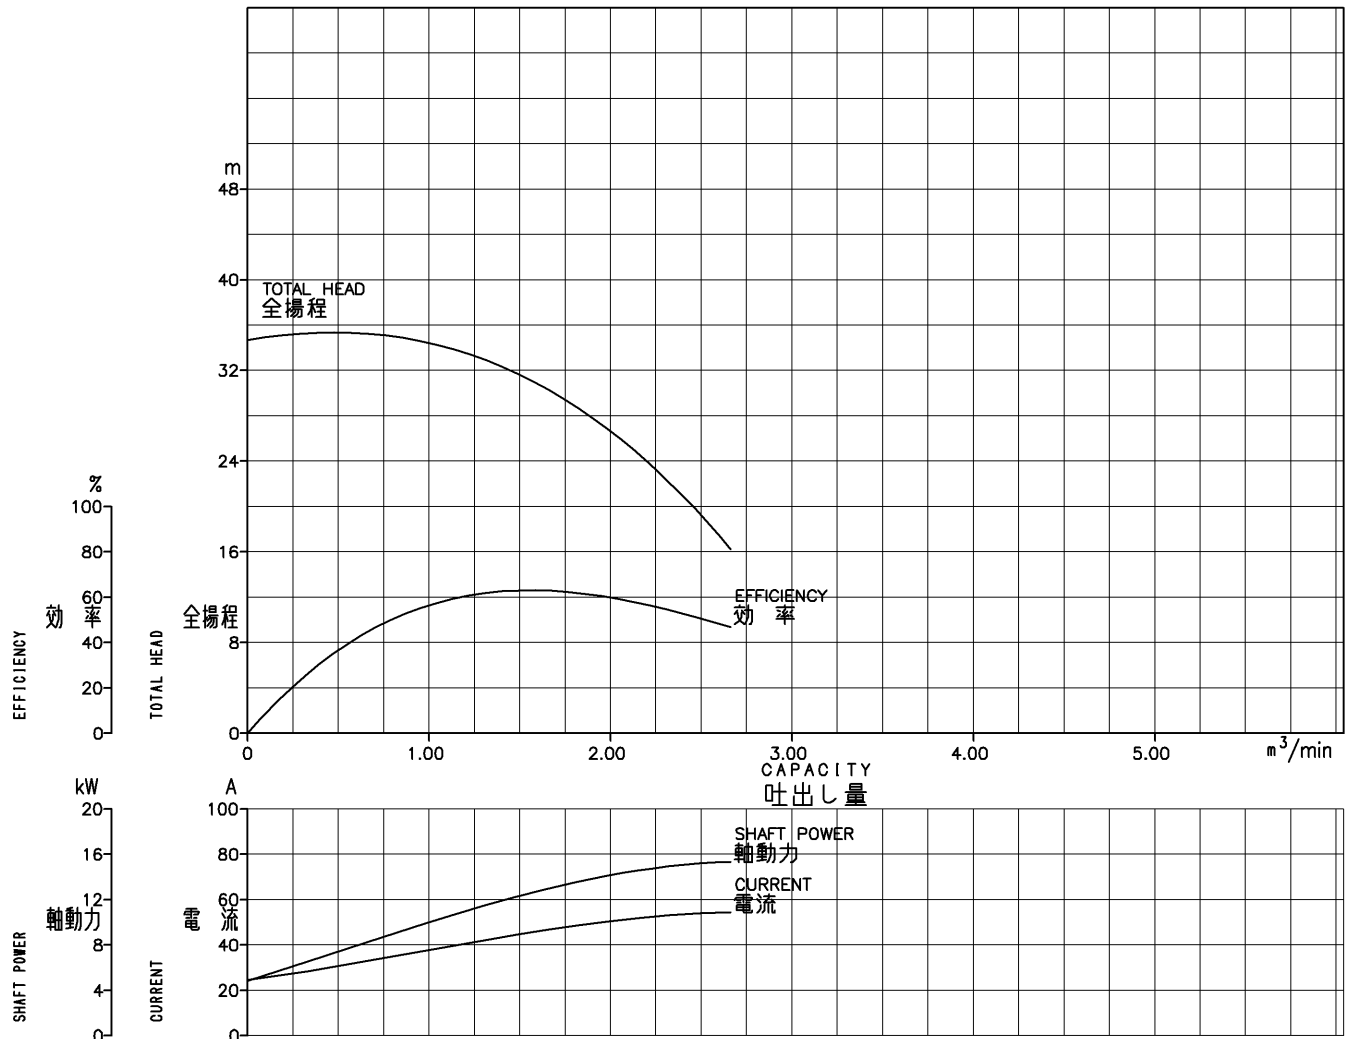

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量 CAPACITY	m^3/min	0	0.50	1.12	1.70	2.24	2.60	—	—	—	—
PUMP	全揚程 TOTAL HEAD	m	34.7	35.4	33.9	29.9	23.4	17.4	—	—	—	—
PUMP	理論動力 WATER POWER	kW	0.0	2.9	6.2	8.3	8.5	7.4	—	—	—	—
PUMP	ポンプ効率 PUMP EFF.	%	0.0	38.8	58.4	63.0	57.8	48.2	—	—	—	—
MOTOR	電圧 VOLTAGE	V	200	200	200	200	200	200	—	—	—	—
MOTOR	電流 CURRENT	A	24.5	30.8	39.6	47.3	52.6	54.4	—	—	—	—
MOTOR	入力 INPUT	kW	5.3	8.0	11.3	14.1	15.9	16.4	—	—	—	—
MOTOR	出力 OUTPUT	kW	4.8	7.4	10.6	13.1	14.8	15.3	—	—	—	—
PUMP	仕様 吐出量 CAPACITY	m^3/min					性能 吐出量 CAPACITY	m^3/min				
PUMP	REQU. 全揚程 TOTAL HEAD	m					PERF. 全揚程 TOTAL HEAD	m				
PUMP	ポンプ口径 PUMP SIZE	125 mm		羽根径 IMP. DIA.	mm		同期回転速度 SYNC. SPEED OF ROTATION	1800 min^{-1}				
MOTOR	型式 MODEL	SF-PR		出力 OUTPUT	15 kW		相・電圧 PHASE-VOLT.	3φ 200 V				
MOTOR	極数・周波数 POLE-FREQ.	4P 60 Hz		回転速度 SPEED OF ROTATION	1760 min^{-1}		電流 CURRENT	54 A				
MOTOR	製造者 MANUFACT.	MITSUBISHI					電動機 CD MOTOR CD					