




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-125HW18.5-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	------------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

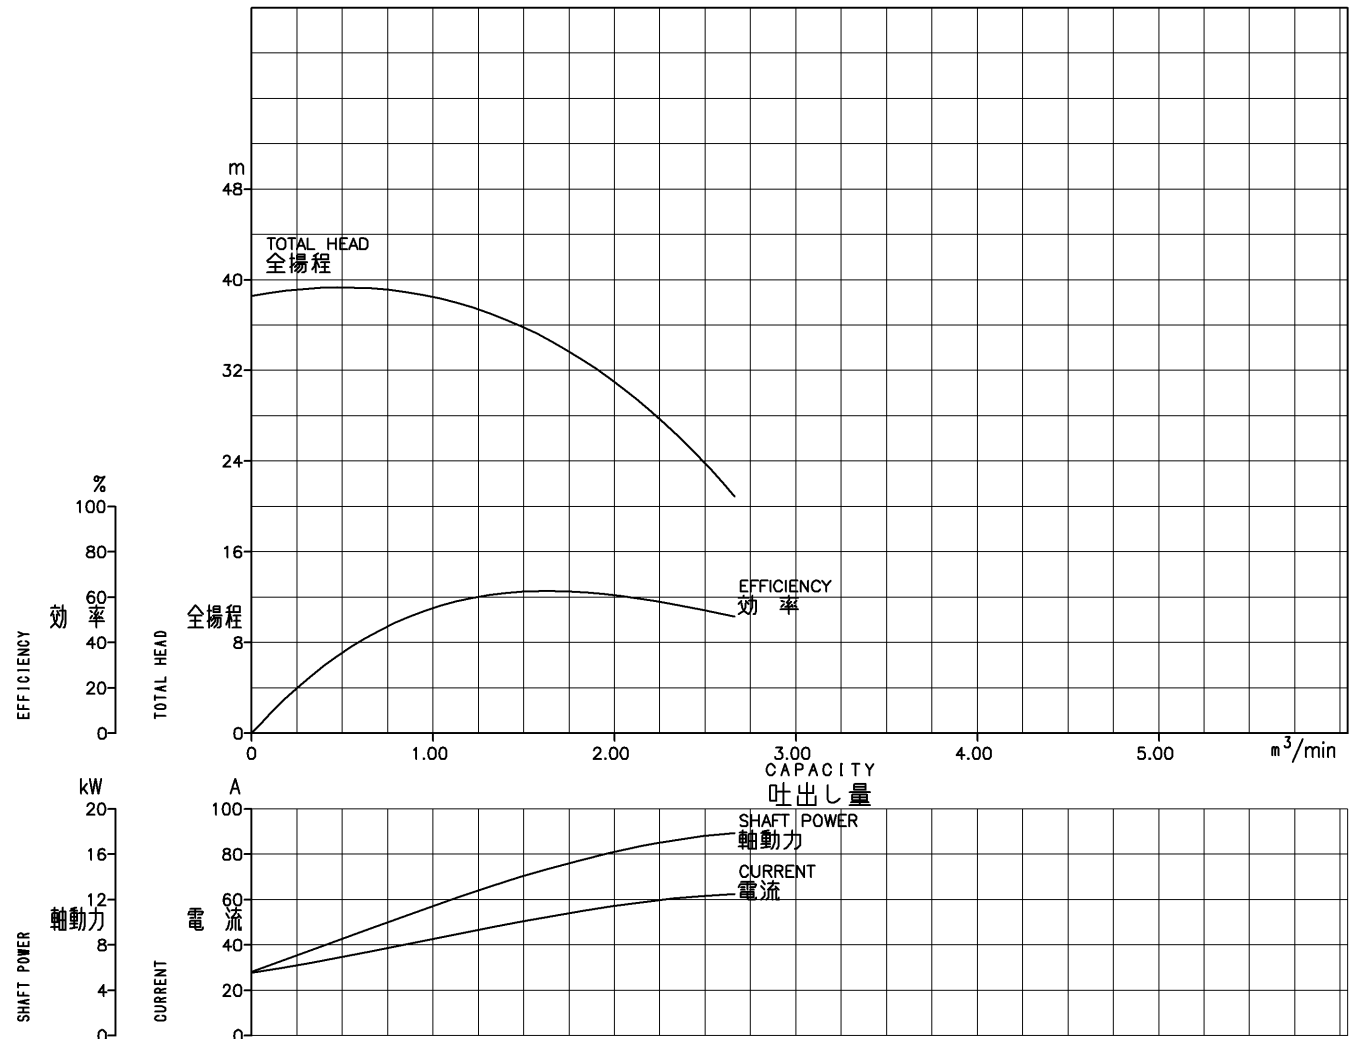

番号		No.		1	2	3	4	5	6	7	8	9	10
PUMP ポンプ	吐出し量	CAPACITY	m ³ /min	0	0.50	1.12	1.70	2.24	2.60	—	—	—	—
	全揚程	TOTAL HEAD	m	38.6	39.3	38.0	34.1	27.8	22.0	—	—	—	—
	理論動力	WATER POWER	kW	0.0	3.2	6.9	9.5	10.2	9.3	—	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	37.5	57.3	63.0	59.8	52.5	—	—	—	—
MOTOR 電動機	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—	—
	電流	CURRENT	A	27.8	34.8	44.7	53.4	59.8	62.3	—	—	—	—
	入力	INPUT	kW	6.2	9.2	12.9	16.0	18.1	19.0	—	—	—	—
	出力	OUTPUT	kW	5.7	8.6	12.1	15.0	17.0	17.8	—	—	—	—
PUMP ポンプ	仕様	吐出し量CAPACITY	m ³ /min				性能	吐出し量CAPACITY	m ³ /min				
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m				
	ポンプ口径	PUMP SIZE	125mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800min ⁻¹		
MOTOR 電動機	型式	MODEL	SF-PR		出力	OUTPUT	18.5kW		相・電圧	PHASE-VOLT.	3φ 200V		
	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1770min ⁻¹		電流	CURRENT	66A		
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD			