




TYPE 名 称	清水用渦巻ポンプ	MODEL 型 式	TON2-150LW7.5-P	FUREQUENCY 周波数	60 Hz
-------------	----------	--------------	-----------------	-------------------	-------

予想性能曲線図 PUMP PERFORMANCE CURVES

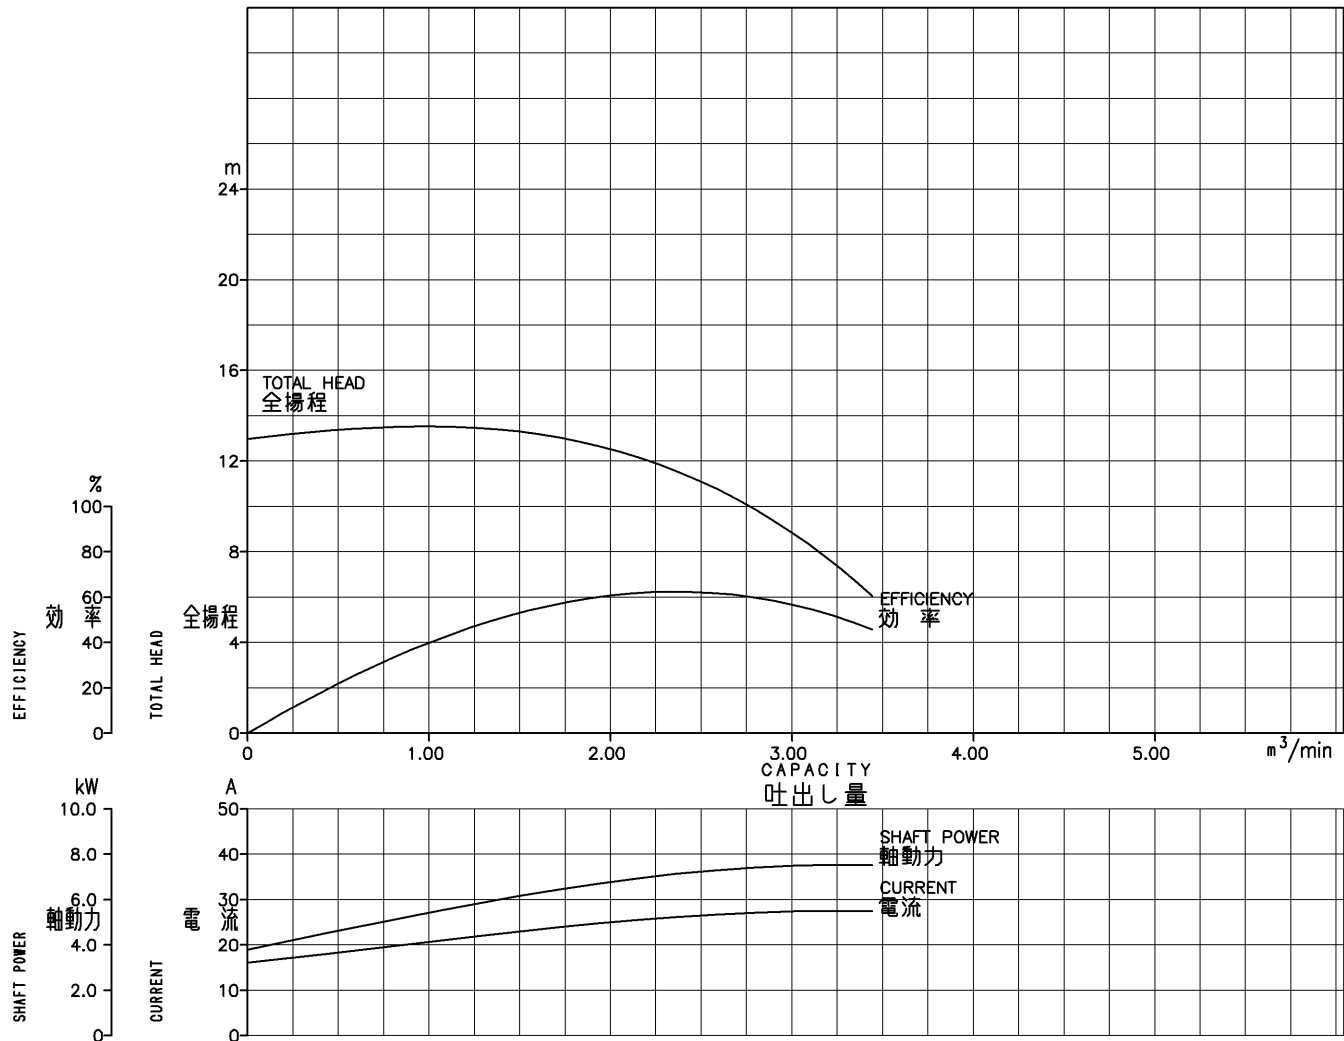

番号	No.		1	2	3	4	5	6	7	8	9	10
PUMP	吐出量	CAPACITY	m^3/min	0	1.00	1.80	2.40	3.00	3.40	—	—	—
	全揚程	TOTAL HEAD	m	13.0	13.5	12.9	11.5	8.8	6.4	—	—	—
	理論動力	WATER POWER	kW	0.00	2.21	3.79	4.48	4.33	3.53	—	—	—
	ポンプ効率	PUMP EFF.	%	0.0	40.6	57.8	62.5	57.7	46.9	—	—	—
MOTOR	電圧	VOLTAGE	V	200	200	200	200	200	200	—	—	—
	電流	CURRENT	A	16.1	20.7	24.2	26.3	27.4	27.5	—	—	—
	入力	INPUT	kW	4.09	5.85	7.10	7.79	8.16	8.19	—	—	—
	出力	OUTPUT	kW	3.80	5.43	6.55	7.17	7.50	7.52	—	—	—
PUMP	仕様	吐出量CAPACITY	m^3/min				性能	吐出量CAPACITY	m^3/min			
	REQU.	全揚程TOTAL HEAD	m				PERF. W.	全揚程TOTAL HEAD	m			
	ポンプ口径	PUMP SIZE	150mm		羽根径	IMP. DIA.	mm		同期回転速度	SYNC. SPEED OF ROTATION	1800 min^{-1}	
	型式	MODEL	SF-PR		出力	OUTPUT	7.5kW		相・電圧	PHASE-VOLT.	3 ϕ 200V	
MOTOR	極数・周波数	POLE-FREQ.	4P 60Hz		回転速度	SPEED OF ROTATION	1755 min^{-1}		電流	CURRENT	28A	
	製造者	MANUFACT.	MITSUBISHI						電動機CD	MOTOR CD		