
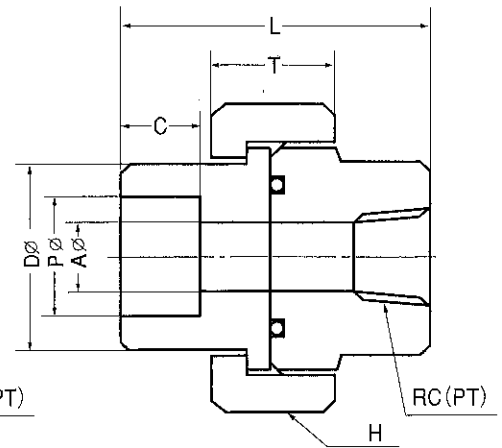
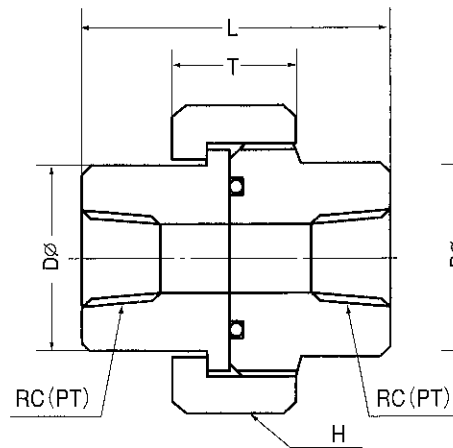


SOCKET WELDING TYPE

SCREW END TYPE

SOCKET END SCREW TYPE

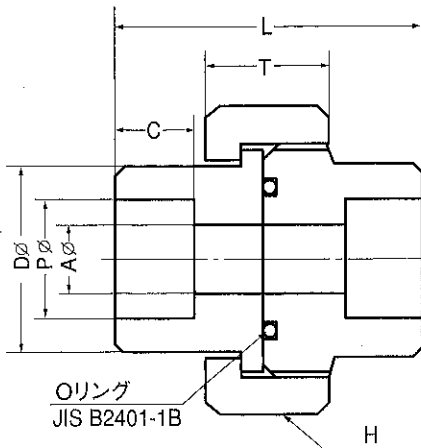

さし込み形 SW-U(O)

ねじ込み形 PT-U(O)

さし込み/ねじ込み形 SW×PT-U(O)

※(S/80)

単位mm

呼称	記号	P	D	C	A	L	T	H	Oリング JIS B2401	GASKET PACKING
										外径×内径×厚み
8	1/4	14.3	22	10	9.4	42	18	36	P16	20φ×13φ×1.5
10	3/8	17.8	26	10	12.7	42	18	41	P20	24.5φ×16.5φ×1.5
15	1/2	22.2	32	10	16.1	42	18	46	G25	28.5φ×20.5φ×1.5
20	3/4	27.7	38	13	21.4	56	24	55	G30	35φ×26φ×1.5
25	1	34.5	46	13	27.2	56	24	65	G35	42.5φ×32.5φ×1.5
32	1 1/4	43.2	55	14	35.5	58	26	77	G45	51.5φ×41φ×1.5
40	1 1/2	49.1	63	16	41.2	74	34	85	G50	58φ×47φ×1.5
50	2	61.1	75	16	52.7	74	34	95	G65	70φ×59φ×1.5
65	2 1/2	77.1	95	26	65.9	92	40	130 ^{八角}	G80	87.5φ×74φ×2.5
80	3	90.0	110	29	78.1	105	40	140 ^{八角}	G90	101.5φ×86.5φ×2.5
100	4	115.5	136	35	97.1	110	50	170 ^{八角}	G115	

シート部パッキンタイプとメタルタッチタイプも製作致して居ります。